


New Refrigerant 50Hz Residential Air Conditioners 2011

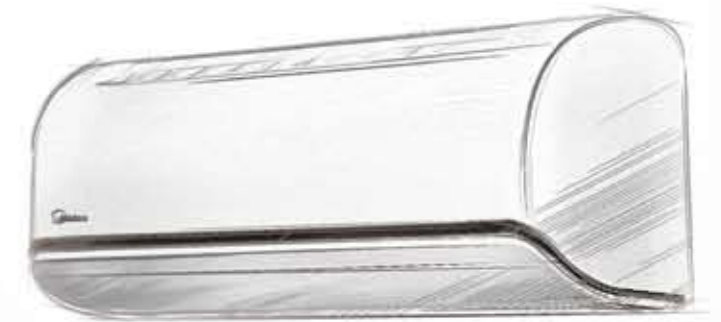

**The International Division
Midea Air Conditioning and Refrigeration Sector**

Add: Midea Headquarter Building, Midea Road, New District of Beijiao,
ShunDe, Foshan, GuangDong, P.R China.

Postal code: 528311

Tel: +86-757-22394101

Fax: +86-757-26338003

<http://www.midea.com>

<http://www.mideaaircon.com>



Corporate Introduction

Midea Group



From its humble beginnings in 1968, Midea has developed into a large corporation, covering HVAC, appliances, lighting, industrial components, logistics, and real estate. Its 40 years of relentless growth has brought its global turnover to \$14 billion USD in 2009. Consequently, Midea has created over 150,000 jobs both within China and all over the world. In addition to providing affordable goods to consumers worldwide, Midea is also a responsible corporate citizen, and has contributed to several social causes.

Midea believes in creating value through rapid response to market demands, cost-efficient operations and consumer satisfaction. As a result, Midea wields vast production capacities to meet these demands, a fully integrated manufacturing process, and a comprehensive range of affordable, high-quality products to serve its global customers.

Today, Midea is a home appliance leader in China. The company continues to actively globalize its operation by opening plants in Vietnam, Belarus and Egypt, as well as several forthcoming plants in the future in order to be closer to the market and offer better products and services.




As a key part of Midea Group, The International Division (TID) of Midea Air-conditioning and Refrigeration Sector is a comprehensive export platform for residential/commercial air-conditioner, washing machine, refrigerator and heat pump water heater, providing best class service to customers worldwide.

Attribute to the belief and core value of "Safety, Quality, Cost, Efficiency", Midea TID has achieved significant growth in global market and successfully maintains its leadership in RAC, CAC, washing machine and refrigerator exports. With its competitive advantages of innovation, production capacity and dedicated services, Midea TID is nowadays regarded as a leading white goods supplier in the international market.



3D DC Inverter

With the combination of advanced inverter driving technology, EEV metering device and DC twin-rotary compressor, the desired super high efficiency air conditioning system is possible.

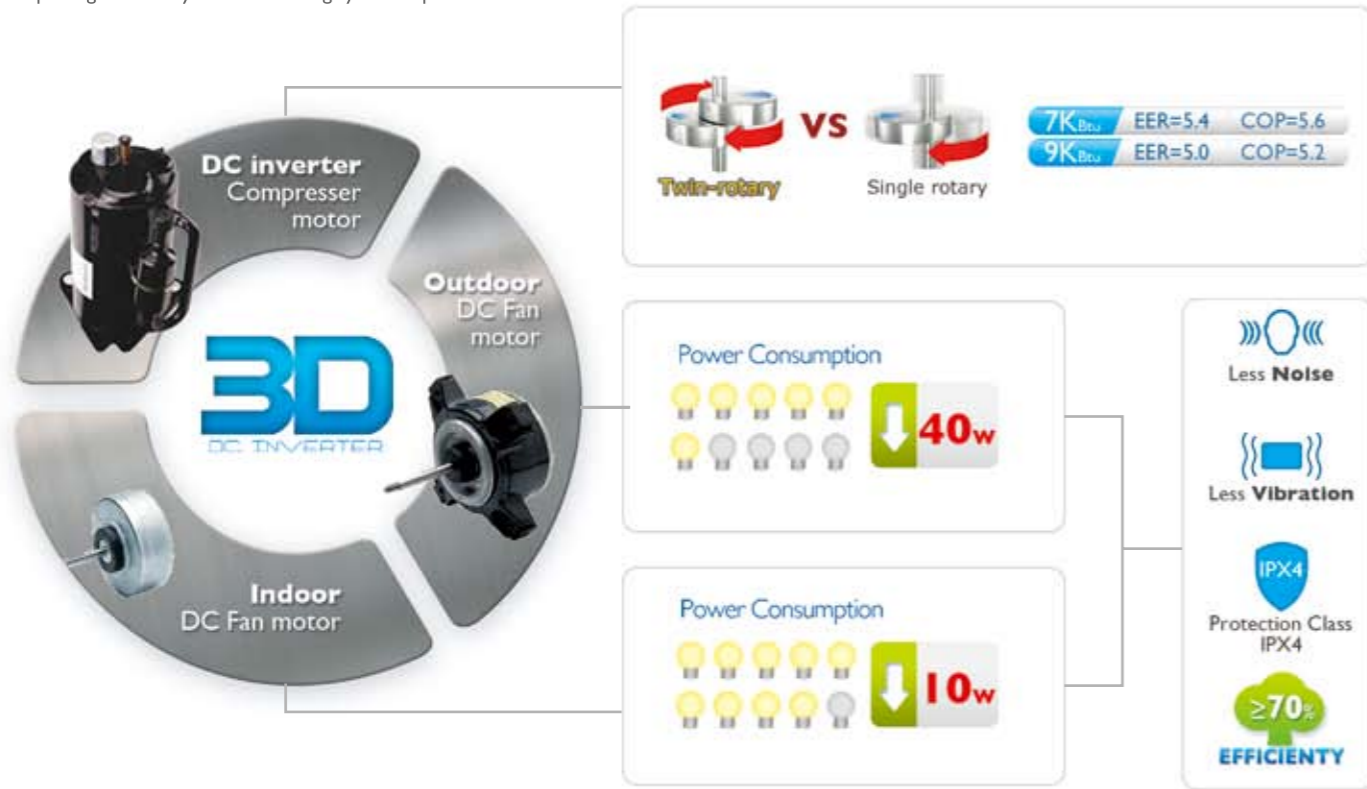

Electronic Expansion Valve

Compared with conventional throttling by utilizing capillary, Electronic Expansion Valve (EEV) makes the refrigerant volume reasonable in the air conditioner system. Under the control of microcomputer, this device throttles up or down the refrigerant precisely according to the actual load situation, which optimizes the use of heat exchanger and improves energy efficiency. Furthermore, EEV extends the flexibility of the air conditioner, improves performance under different temperature condition especially heating operation in extreme low temperature, also makes the room temperature control more precise.





DC Inverter 180° Sine Wave

Compared with 120° Square Wave DC Inverter driving technology, the new 180° Sine Wave DC inverter driving technology has considerable advantages:

1. Applicable much wider range of frequency and voltage
2. More efficient and energy saving
3. Smooth running, low noise and vibration
4. More reliable in operation



Break through in inverter technology

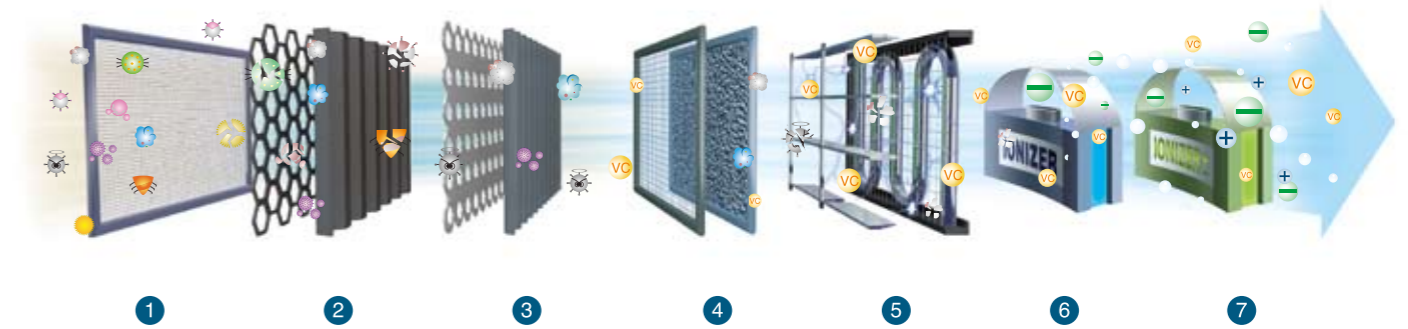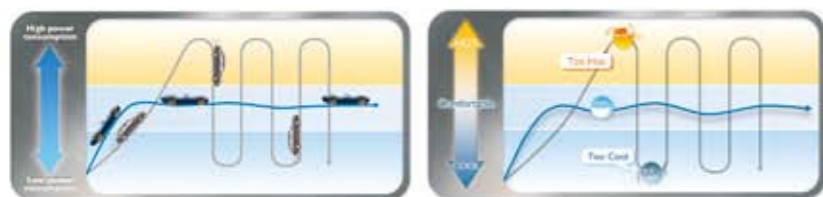

Midea's Fresco Tech brings you clean and refreshing air and fills your room with the soothing scent of nature.

1. Silver Ion Filter

The Silver ion can kill bacteria or prevent their activity at very low density by destroying their inner-configuration and absorbing their elements in cells. Meanwhile, the Nano Silver attached on the filter release the Silver ion constantly to eliminate bacteria effectively.

2. Active Carbon

Active Carbon Electrostatic Fiber Filter is made of Active Carbon and Electrostatic Fiber Filter. Active Carbon Filter eliminates certain kinds of odors such as ammonia (NH3) and deactivates harmful chemical gas such as formaldehyde(HCHO). By forming positive positions on the filter surface, Electrostatic Fiber Filter traps small dust particles, smoke and pet fur to prevent allergic reactions.

3. Vitamin C Filter

The Vitamin C filter fills the air with vitamin C, which softens the skin and reduces stress. The lifetime of the Vitamin C filter is approximately two years.

4. Bio Filter

Bio Filter consists of a specialized biological enzyme and Eco filter. The Eco filter catches very small airborne dust particles and neutralities bacteria, fungi and microbes. Biological enzyme eliminates bacteria by dissolving their cell wall thus eliminating the problem of re-pollution.

5. Plasma Dust collector

The Plasma Dust Collector can generate an ionization zone. The air is converted to plasma as it passes the high voltage ion generator. 95% of the dust, smoke, and pollen particles are attracted to the electrostatic filter.

6. Ionizer

Anions can take care of your body. Anions can stimulate the blood circulation system, improve lung function and effectively prevent respiratory passage illnesses (Such as asthma and pneumonia).

7. Super Ionizer

Cutting edge technology releases Sterionizer to change surrounding bacteria structure, hence minimize bacteria level. The super Ionizer purifies the air and improve oxygen quality.


Environment Concern

Environment protection is a hot topic all over the world. Environment concern is our responsibility and working philosophy. Work together with TUV, we take actions to comply European new REACH and Eup. directive.




1W Standby

Intelligent on-off technology enables Midea products automatically enter energy-saving mode when standby, cut energy consumption from normal 4-5W to 1W which counts 70% of saving.

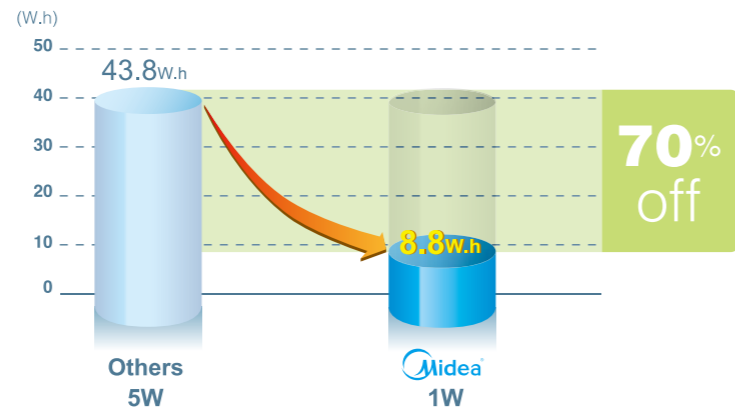

Remote Control

After you finish setting the air conditioner through remote control, the remote control can remember all the setting parameters itself. Next time when you start the unit with remote control, the unit will run under the mode that recorded. You don't need to set the parameters again, and enjoy more convenience.

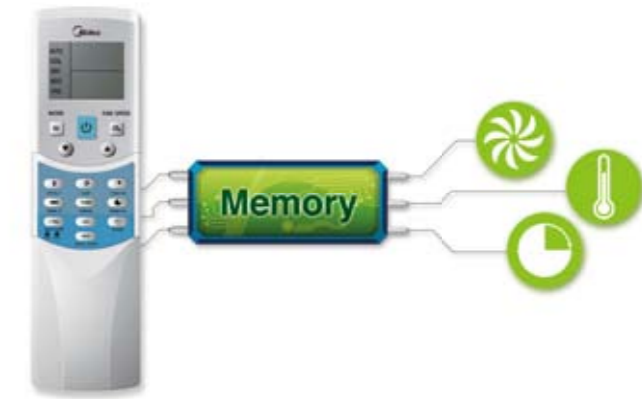

Health

Silver Ion Filter
The Silver Ion, released from the Nano Silver that attached on the filter, can kill bacteria or deactivate them at very low density effectively and continuously by destroying their inner-configuration and absorbing their elements in cells.

Bio Filter
Bio filter consists of a specialized biological enzyme and Eco filter. The Eco filter catches very small airborne dust particles and neutralizes bacteria, fungi and microbes. Biological enzyme kills bacteria by dissolving their cell wall thus eliminating the problem of re-pollution.

Vitamin C Filter
The Vitamin C filter fills the air with Vitamin C, which softens the skin and reduce stress. The lifetime of this filter is approximately 2 years.

Active Carbon Filter
The filter is made up of Active Carbon layer and Electrostatic Fiber layer. Active Carbon eliminates certain kinds of odors such as ammonia (NH3) and deactivates harmful chemical gas like formaldehyde (HCHO). By forming positive electrode on the filter surface, Electrostatic Fiber layer traps small dust particles, smoke and pet fur to prevent allergic reaction.

Plasma Dust Collector
The Plasma Dust Collector generates an high voltage electrostatic field. The air passing through this zone is converted to plasma, and 95% of the dust, smoke and pollen particles are attracted to the electrostatic filter.

Ionizer
Anions, always be found in forest or beside waterfall, can stimulate the blood circulation system in people's body, improve lung function and effectively prevent respiratory passage illnesses (such as asthma and pneumonia).

Self-Cleaning
When this function is activated, firstly the indoor unit operates as cooling mode with low fan speed, during this period the condensed water will take some dust on evaporator fins away. After that the unit turns to heating operation with low fan speed, which dries the inside of indoor unit. Finally it turns to fan-only mode and blows away the wet air. The whole process cleans the internal side of indoor unit and prevents the breeding of bacteria.

Comfort

8°C Heating
In heating operation, the preset temperature of the air conditioner can be as lower as 8°C, which keeps the room temperature steady at 8°C for in winter.

PTC Auxiliary Heating
With a built-in PTC device, the heating operation is more powerful even in some extreme cold area.

Anti-Cold-Air (Heat Pump Only)
When starting the heating operation, the fan speed is regulated automatically from the lowest grade to the preset level, according to the temperature rising of evaporator. This function can prevent cold air blowing out at the beginning of the operation, which avoids the discomfort to the user.

Low Noise Airflow System
Without decreasing the airflow volume and capacity output, large diameter cross flow fan can bring down the indoor unit noise level by lowering the fan speed.

Turbo Operation
With this function, the air conditioner will maximize the output of cooling or heating capacity, make the room cool down or heat up rapidly, and attain the desired temperature in the shortest time.

Wide-Angle Airflow
The design of large louvers, with wide swing angle range, Guiding the cool or warm air to every corner of the room.

Temperature Compensation
Based on different installation height of indoor unit, the temperature deviation of the sensor sensed against the actual floor temperature always is different. Changing the jumping wires combination on the indoor PCB is possible to compensate the deviation. This could be achieved by installer in the installation field.

Independent Dehumidification
The individual dehumidification mode dehumidifies the room efficiently, but not lower the temperature so obviously as cooling operation.

Follow Me
With this function, the temperature sensor built in remote controller is activated and replaces the sensor of in indoor unit. Then the air conditioner will control the room temperature based on temperature around the remote controller, just like the air conditioner is following the user.

Two-Direction Airflow
Due to the density of cold and warm air is different, in cooling mode the indoor unit blows out cool air horizontally while vertically of that in heating mode. This technology makes the room temperature more consistent and comfortable during the operation.

LCD Display
Control panel of indoor unit adopts LCD display.

Auto Changeover
In this mode, the air conditioner changes operation modes and capacity output automatically according to different preset and room temperature.

Reliability

PTC Heating Belt
With a PTC heating belt fitted on the base plate of the outdoor unit, the rain, snow or defrosted water accumulating on the base plate is avoided.

Low Ambient Kit
The air conditioner with a special built-in Low Ambient Kit can be used in temp. as low as 15°C for cooling operation.

Self-diagnosis Function
Monitoring some abnormal operations or parts failures, microcomputer of the air conditioner will switch off and protect the system automatically. Meanwhile, the error or protection code will be displayed on the indoor unit.

Soft-start Kit
With this kit, the big capacity units, especially for the type of consuming single phase power, will reduce starting current and weaken the impact to power grid significantly.

Valve Protection Cover
The cover protects the valves against impact during transportation. Furthermore, it also prevents the condensed water on the valve from dripping.

Two-speed Outdoor Fan Motor
With Two-speed Outdoor Fan Motor, the applicable temperature ranges of the outdoor unit are widened for both cooling and heating operation.

Energy Saving

Trapeziform Innergroove Copper Piping
Compared with the traditional copper piping, it allow more refrigerant to go through, improving heat exchange efficiency and lowering power consumption while keeping the same capacity output level.

Multi-bend Evaporator
Within compact internal space of indoor unit, multi-bend evaporator helps increase heat exchange surface for improving efficiency.

Hydrophilic Aluminium Fin
In indoor unit, heat exchanger using Hydrophilic Aluminium Fins improve cooling efficiency by enabling the unrestricted flow of condensed water between the fins. In outdoor unit, it improves heating efficiency by accelerating the defrosting process.

Sleep Mode
This function enables the air conditioner to automatically increase (cooling) or decrease (heating) 1°C per hour for the first two hours, then holds steady for the next 5 hours, after that it will switch off. This characteristic maintains both energy saving and comfort in night operation.

Convenience

Cleanable Panel
Front panel of the indoor unit is easy to be detached for periodic cleaning.


Flexible Wiring Connection
Terminal block makes the cable connection between indoor and outdoor units much more flexible.

2 Ways Piping Connection
Both left and right sides of the indoor unit are possible for outstretch of connective piping and drainage hose

Quick Connector
For this kind of air conditioner, the installation is quite easy and facile and not so costly.

Wired Controller
Compared with infrared remote controller, Wired Controller can be fixed on the wall and avoid mislaying. It's mainly used for commercial zone and makes air conditioner control more convenient.

Auto-Restart
If the air conditioner breaks off unexpectedly due to the power cut, it will restart with the previous function setting automatically when the power resumes.

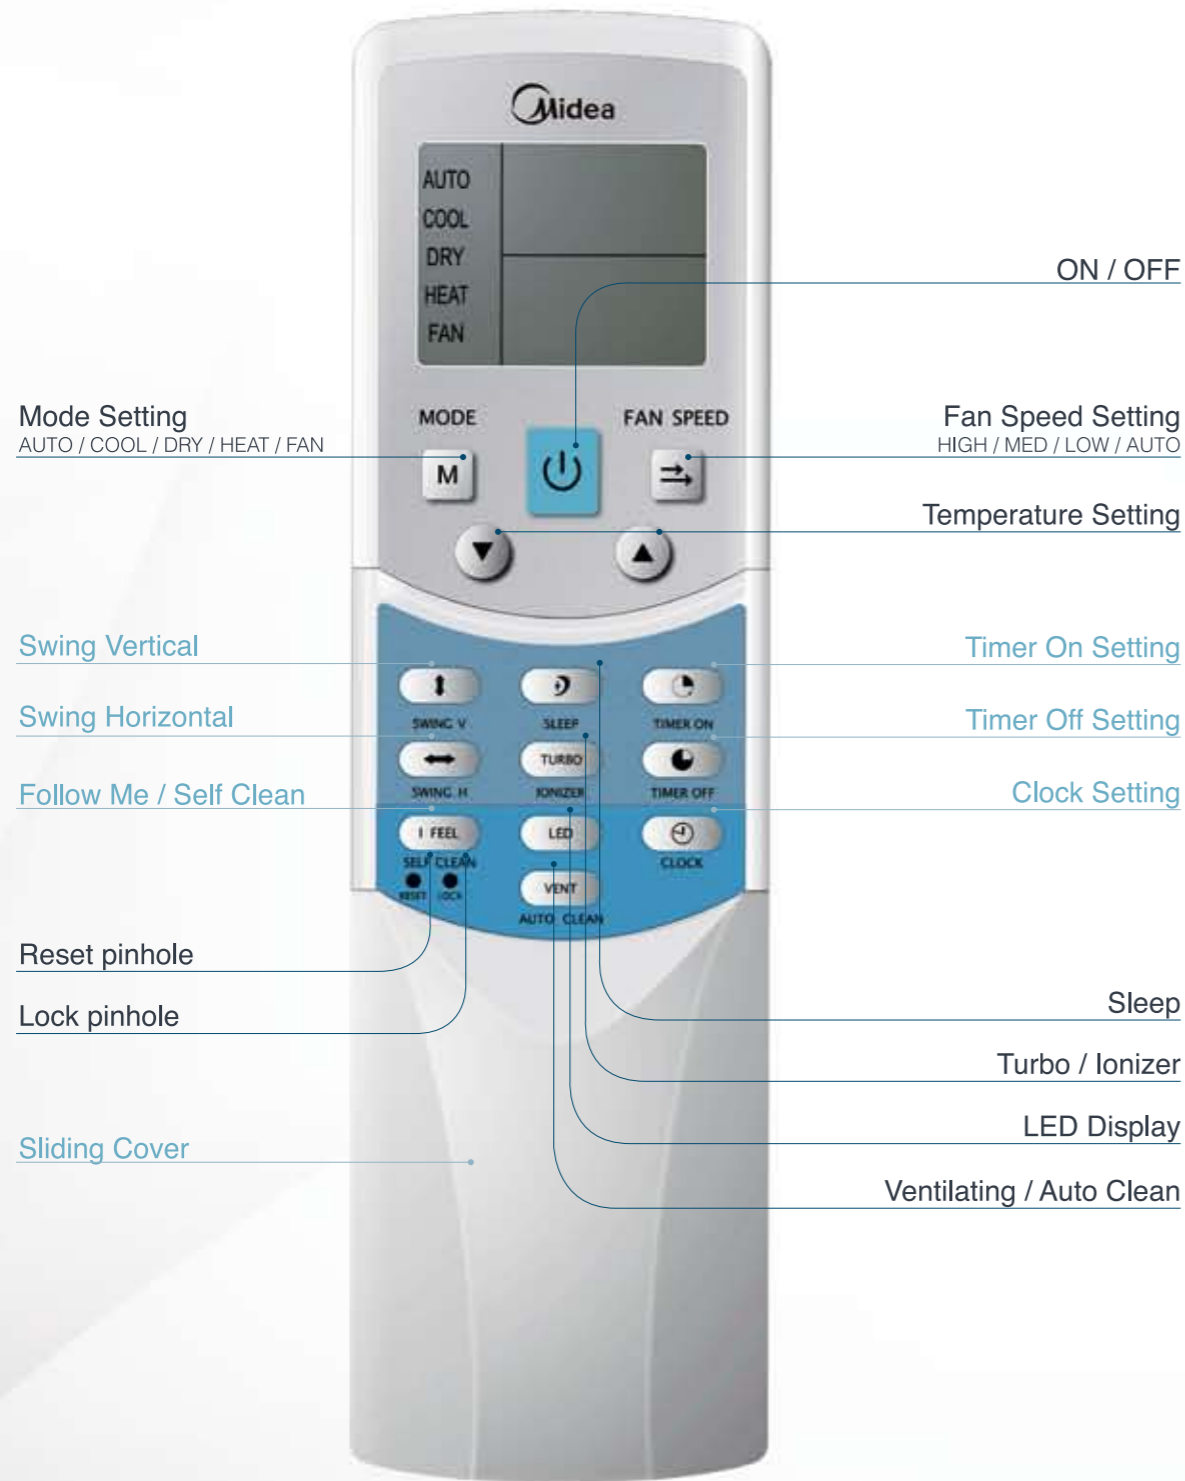

M S X I - 12 H R D N - Q D2 F

Special Function

- F** Ionizer
- L** Low Ambient Kit
- Q** Quicker Connect
- J** Plasma
- H** Fresh Air
- P** Soft-starter Kit

EER Code

- A0-A9** 1.0-1.9
- B0-B9** 2.0-2.9
- C0-C9** 3.0-3.9
- D0-D9** 4.0-4.9

Power Code

- Q** 220-240V~, 50Hz, 1Phase
- R** 380-420V~, 50Hz, 3Phase
- S** 380V~, 50Hz, 3Phase

Refrigerant

- N1** R410A
- N2** R407C
- N3** R134a
- R22

Inverter Type

- I** AC Inverter
- Constant Speed
- D** DC Inverter

Control Mode

- W** Wire Control
- M** Mechanical Control
- E** Electric Control
- R** Remote Control

Function Code

- C** Cooling Only
- A** Heat Pump with Auxiliary Electric Heater
- E** Cooling & Electric Heater
- H** Heat Pump

Capacity

Air Conditioner: Cooling/Heating Capacity (x1000Btu/h)
Dehumidifier: Moisture Removal Volume (L/day)

Connection Type

- I** Multi Type
- Single Type

Product Series






- Residential**
- 1A** Alps Series
 - V1** Vertu Series
 - C** Corona Series
 - X** X Series
 - 9V1** Vida Series
 - R1** R Series
 - Y** Y Series
 - 9A1** Luna Series

Unit Type

- Residential**
- S** Split Wall-mounted
 - W** Window
 - D** Dehumidifier
 - O** Outdoor unit
 - P** Portable

Midea







Light Commercial

	Series	DC Inverter	ON/OFF	
	Four-way Cassette (Compact)	12K 18K	12K 18K	18-19
	Four-way Cassette	18K 24K 30K 36K 48K 60K	24K 30K 36K 48K 60K	20-21
	Ceiling & Floor	12K 18K 24K 30K 36K 48K 60K	12K 18K 24K 30K 36K 48K 60K	22-23
	Console	12K 18K	12K 18K	24-25
	Duct	12K 18K 24K 30K 36K 48K 60K	12K 18K 24K 30K 36K 48K 60K	26-28









Split

	Series	Super DC Inverter	DC Inverter (COP4.2)	DC Inverter	ON/OFF	Multi (ON/OFF)	
	Alps	9K 12K 18K 24K					30-31
	X	7K 9K 12K 18K					32-33
	Y	9K 12K	9K 12K	9K 12K 18K	7K 9K 12K 18K	9K 12K	34-37
	Vertu	9K 12K	9K 12K	9K 12K 18K 24K	7K 9K 12K 18K 21K 24K	9K 12K	38-41
	Vida	9K 12K	9K 12K	9K 12K 18K 24K	7K 9K 12K 18K 21K 24K	9K 12K	42-45
	Luna	9K 12K	9K 12K	9K 12K 18K 24K	7K 9K 12K 18K 21K 24K	9K 12K 18K	46-49
	Corona	9K 12K	9K 12K	9K 12K 18K 24K	7K 9K 12K 18K 21K 24K	9K 12K 18K	50-53
	Glory			9K 12K 18K 24K	7K 9K 12K 18K 24K 36K	9K 12K	54-57
	R			9K 12K 18K 24K	7K 9K 12K 18K 21K 24K	9K 12K	58-60


Portable


	Series	Btu/h			
	Tango	7K	9K		62-63
	Nova		9K	12K	64-65
	N3	7K	9K		66-67
	N/N1	8K	9K	12K	68-69
	M4/M5		9K	12K	70-71
	Mini	7K	9K		72-73


Dehumidifier


	Series	L/day					
	T1	8L/day	10L/day	16L/day	20L/day		75-76
	T2		10L/day				77-78
	N3	8L/day	10L/day	16L/day	20L/day		79-80
	N1	8L/day	10L/day				81-82
	N	8L/day	10L/day				81-82
	N2	8L/day	10L/day				81-82
	F2	8L/day	10L/day	12L/day	16L/day	20L/day	83-84
	F3	8L/day	10L/day	12L/day	16L/day	20L/day	83-84


Window


	Series	Btu/h			
	H/F1/F	9K	12K	16K	86-87

M2OC-14HRDNI	One Unit	Two Units
	7 9 12	7+7 9+9 7+9 9+12 7+12


M2OCI-18HRDNI-Q	One Unit	Two Units
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 12+12 7+18


M3OC-21HRDNI-Q	One Unit	Two Units	Three Units
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 9+18 7+18 12+12	7+7+7 7+9+9 7+7+9 9+9+9 7+7+12 9+9+12 7+9+9

M3OCI-27HRDNI-Q	One Unit	Two Units	Three Units
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 9+18 7+18 12+12	7+7+7 7+9+9 7+7+9 7+9+12 7+7+12 7+12+12 7+7+18 9+9+9

M4OC-24HRDNI-Q	One Unit	Two Units	Three Units	Four Units
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 9+18 7+18 12+12	7+7+7 7+9+9 7+7+9 7+9+12 7+7+12 7+12+12 7+7+18 9+9+9	9+9+12 7+7+7+7 7+7+9+12 7+9+9+9 7+7+7+12 7+9+9+12 7+7+9+9 9+9+9+9

M4OC-27HRDNI	One Unit	Two Units	Three Units	Four Units
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 9+18 7+18 12+12	7+7+7 7+9+9 7+7+9 7+9+12 7+7+12 7+9+12 7+7+18 7+12+12	9+9+12 7+7+7+7 7+7+9+9 7+7+7+9 7+7+9+12 7+7+7+12 7+7+12+12 7+7+7+18 7+9+9+9

M4OC-36HRDNI-Q	One Unit	Two Units	Three Units	Four Units
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 9+18 7+18 12+12	7+7+7 7+9+9 7+7+9 7+9+12 7+7+12 7+9+12 7+7+18 7+12+12	9+9+12 7+7+7+7 7+7+9+9 7+7+7+9 7+7+9+12 7+7+7+12 7+7+12+12 7+7+7+18 9+9+12

M5OA-36HRDNI-Q	One Unit	Two Units	Three Units	Four Units	Five Unit
	7 9 12 18	7+7 9+9 7+9 9+12 7+12 9+18 7+18 12+12	7+7+7 7+9+9 7+7+9 7+9+12 7+7+12 7+9+12 7+7+18 7+12+12	9+9+12 7+7+7+7 7+7+9+9 7+7+7+9 7+7+9+12 7+7+7+12 7+7+12+12 7+7+7+18 9+9+12	12+18+18 7+7+7+7+7 7+7+7+9+9 7+7+7+7+9 7+7+7+12+18 7+7+7+7+12 7+7+7+18+18 7+7+7+7+18 7+9+9+12 7+7+7+9+9 7+9+9+9 7+7+7+9+12 7+9+9+12 7+7+7+9+18 9+9+9+12 7+7+7+9+18 9+9+9+12

DC Inverter 1x2

	Outdoor Unit		M2OC-14HRDNI	M2OCI-18HRDNI-Q
Capacity	Cooling Capacity	nor(min-max) Btu/h	14000(7000~16000)	18000(7000~19000)
	Heating Capacity	nor(min-max) Btu/h	15000(9000~17000)	21000(10000~22000)
Electrical Parts	Power Supply(V~,Hz,Ph)		220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph
	Power Input (W)	Cooling/Heating	1270/1220	1620/1670
	Operating Current (A)	Cooling/Heating	5.7/5.5	7.5/7.6
Performance	EER/COP	W/W	3.23/3.61	3.21/3.65
	Net Dimension	WxHxD (mm)	760x590x285	845x695x335
	Packing Dimension	WxHxD (mm)	887x645x355	965x755x395
	Net/Gross Weight	kg	39/41	53.5/57
	Air Flow	m³/h	2200	2500
	Noice Level	dB(A)	53	53
Liquid/Gas Side	mm		2x(Ø6.35/Ø9.53)	2x(Ø6.35/Ø9.53)

DC Inverter 1x3

	Outdoor Unit		M3OCI-21HRDNI-Q	M3OCI-27HRDNI-Q
Capacity	Cooling Capacity	nor(min-max) Btu/h	21000(7000~25000)	27000(7000~28000)
	Heating Capacity	nor(min-max) Btu/h	23000(9000~26000)	30000(10000~31000)
Electrical Parts	Power Supply(V~,Hz,Ph)		220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph
	Power Input (W)	Cooling/Heating	1910/1860	2400/2420
	Operating Current (A)	Cooling/Heating	8.6/8.4	11/11.2
Performance	EER/COP	W/W	3.22/3.62	3.25/3.63
	Net Dimension	WxHxD (mm)	845x695x335	845x695x335
	Packing Dimension	WxHxD (mm)	965x755x395	965x755x395
	Net/Gross Weight	kg	55/60	57/60.5
	Air Flow	m³/h	2500	2500
	Noice Level	dB(A)	55	55
Liquid/Gas Side	mm		3x(Ø6.35/Ø9.53)	3x(Ø6.35/Ø9.53)

DC Inverter 1x4

	Outdoor Unit		M4OC-24HRDNI-Q	M4OC-27HRDNI	M4OC-36HRDNI-Q
Capacity	Cooling Capacity	nor(min-max) Btu/h	24000(7000~27000)	27000(7000~31000)	36000(7000~43000)
	Heating Capacity	nor(min-max) Btu/h	26000(9000~28000)	30000(9000~34000)	38000(9000~45000)
Electrical Parts	Power Supply(V~,Hz,Ph)		220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph
	Power Input (W)	Cooling/Heating	2190/110	2470/2440	3450/3380
	Operating Current (A)	Cooling/Heating	9.6/9.2	11.2/11.1	15.5/15.2
Performance	EER/COP	W/W	3.21/3.61	3.21/3.61	3.04/3.28
	Net Dimension	WxHxD (mm)	845x695x335	895x860x330	990x966x396
	Packing Dimension	WxHxD (mm)	965x755x395	1043x915x395	1120x1100x435
	Net/Gross Weight	kg	56/60	78/82	86/90
	Air Flow	m³/h	2500	3500	5800
	Noice Level	dB(A)	55	57	61
Liquid/Gas Side	mm		4x(Ø6.35/Ø9.53)	4x(Ø6.35/Ø9.53)	4x(Ø6.35/Ø9.53)

DC Inverter 1x5

	Outdoor Unit		M5OA-36HRDNI-Q
Capacity	Cooling Capacity	nor(min-max) Btu/h	36000(7000~43000)
	Heating Capacity	nor(min-max) Btu/h	40000(9000~48000)
Electrical Parts	Power Supply(V~,Hz,Ph)		220-240V~,50Hz,1Ph
	Power Input (W)	Cooling/Heating	3480/3430
	Operating Current (A)	Cooling/Heating	15.6/15.4
Performance	EER/COP	W/W	3.03/3.42
	Net Dimension	WxHxD (mm)	990x966x396
	Packing Dimension	WxHxD (mm)	1120x1100x435
	Net/Gross Weight	kg	88/92
	Air Flow	m³/h	5800
	Noice Level	dB(A)	61
Liquid/Gas Side	mm		5x(Ø6.35/Ø9.53)

Specification_ON/OFF

	Indoor Unit Outdoor Unit		MTB-12HWN1-Q MOU-12HNI	MTB-18HWN1-Q MOU-18HNI-Q	MTB-24HWN1-Q MOU-24HNI-Q	MTB-30HWN1-Q MOU-30HNI-Q	MTB-30HWN1-R MOU-30HNI-R
Capacity	Cooling Capacity	Btu/h	12000	18000	24000	30000	30000
		kW	3.2	5.3	7.1	9.0	9.0
	Heating Capacity	Btu/h	13000	20000	26000	32000	32000
		kW	4.0	6.0	7.6	9.5	9.5
Electrical Parts	Power Supply	V~,Hz,Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	380-420, 50,3
	Power Input (kW)	Cooling	1.060	1.755	2.415	3.169	3.167
		Heating	1.212	1.875	2.420	3.333	3.330
Performance	EER	W/W	3.02	3.02	2.94	2.84	2.84
	COP	W/W	3.30	3.20	3.14	2.85	2.85
	Air Flow Volume	m ³ /h	800/610/520	1170/770/650	1400/1100/1000	2250/1940/1720	2250/1940/1720
	Static Pressure	Pa	40	70	70	80	80
	Noise Level (dB(A))	Hi/Med/Low	36,9/30,2/26,4	44,0/35,9/32,8	45,1/43,2/40,9	46,1/44,0/42,2	46,1/44,0/42,2
Dimension & Weight & Piping Size	Net Dimension (mm)	WxHxD	700x210x635	920x210x635	920x270x635	1140x270x775	1140x270x775
	Net Weight	kg	20	24	28	41	41
	Packing Dimension (mm)	WxHxD	915x290x655	1135x290x655	1135x350x655	1355x350x795	1355x350x795
	Gross Weight	kg	25	30	34	46	46
		Piping Size (mm)	Liquid	Ø6.4	Ø6.4	Ø9.5	Ø12.7
	Gas		Ø12.7	Ø12.7	Ø15.9	Ø19.0	Ø19.0
Drainage	ODØ25	ODØ25	ODØ25	ODØ25	ODØ25		
Applicable Area & Stuffing Quantity	Applicable Area	m ²	13-21	21-35	28-47	36-60	36-60
	Stuffing Quantity (Set)	20'/40'/40'HQ	86/174/198	61/133/151	47/107/120	27/59/68	27/59/68

	Indoor Unit Outdoor Unit		MTB-36HWN1-Q MOU-36HNI-Q	MTB-36HWN1-R MOU-36HNI-R	MTB-48HWN1-R MOU-48HNI-R	MTB-60HWN1-R MOU-60HNI-R
Capacity	Cooling Capacity	Btu/h	36000	36000	48000	60000
		kW	10.5	10.5	14.0	16.0
	Heating Capacity	Btu/h	40000	40000	52000	65000
		kW	12.0	12.0	15.4	17.6
Electrical Parts	Power Supply	V~,Hz,Ph	220-240, 50, 1	380-420, 50,3	380-420, 50,3	380-420, 50,3
	Power Input (kW)	Cooling	3.737	3.737	5.109	5.861
		Heating	4.270	4.270	5.500	6.308
Performance	EER	W/W	2.81	2.81	2.74	2.73
	COP	W/W	2.81	2.81	2.80	2.79
	Air Flow Volume	m ³ /h	2270/1890/1650	2270/1890/1650	3010/2410/1940	3150/2510/1990
	Static Pressure	Pa	80	80	100	100
	Noise Level (dB(A))	Hi/Med/Low	46,1/44,0/42,2	46,1/44,0/42,2	47,1/45,3/42,9	47,3/45,2/43,1
Dimension & Weight & Piping Size	Net Dimension (mm)	WxHxD	1140x270x775	1140x270x775	1200x300x865	1200x300x865
	Net Weight	kg	41	41	47	47
	Packing Dimension (mm)	WxHxD	1355x350x795	1355x350x795	1385x373x920	1385x373x920
	Gross Weight	kg	46	46	55	55
		Piping Size (mm)	Liquid	Ø12.7	Ø12.7	Ø12.7
	Gas		Ø19.0	Ø19.0	Ø19.0	Ø19.0
Drainage	ODØ25	ODØ25	ODØ25	ODØ25		
Applicable Area & Stuffing Quantity	Applicable Area	m ²	42-70	42-70	56-93	64-107
	Stuffing Quantity (Set)	20'/40'/40'HQ	27/59/68	27/59/68	17/41/59	17/41/59

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Wall Mounted





 220-240V~, 50Hz
Super DC Inverter



Ultra High Efficiency

Midea's optimized refrigeration system is built by excellent compressor, high-efficiency motor and 4-bend heat exchanger. The energy consumption can be reduced by 30% compared with the energy Class A in common.




Super-Slient Airflow System

Besides the technology of controlling the airflow volume and capacity output, a large diameter cross-flow fan can minimize the noise level of the indoor unit by lowering fan speed and optimizing air flow.




Super PLASMA Air Purifier



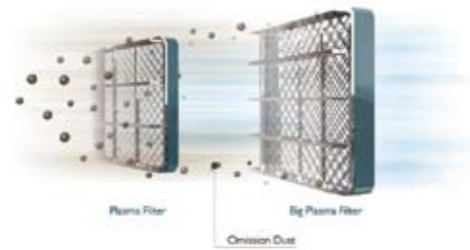







The PLASMA zone is a high voltage electrostatic generation field. With the larger size, Super PLASMA Air Purifier makes more air circulation and increases the quality of air purification.



Quick & Easy Installation

With a special designed collapsible bracket on the rear of indoor unit, the pipes connection work is easier and convenient which can save the installation time and cost.



-  Auto Restart Function
-  Auto Swing
-  Fashion Design
-  Flexible Installation Kit
-  Follow Me
-  Self-cleaning
-  Sleep Mode
-  Turbo Mode
-  Heating Belt (outdoor)
-  Low Ambient Cooling

Features: ■ Standard ■ Optional

Specification_Alps Series (Super DC Inverter)



	Indoor Unit	Outdoor Unit	MSIA-09HRFNI-QE0 MOC-09HFNI-QE0	MSIA-12HRFNI-QD2 MOC-12HFNI-QD2	MSIA-18HRFNI-QC4 MOC-18HFNI-QC4	MSIA-24HRFNI-QC2W MOC-24HFNI-QC2W	
Capacity	Cooling Capacity	Btu/h	9000(2600~11500)	12000(2600~13500)	17000(2800~18000)	23000(12000~25000)	
		kW	2.6(0.7~3.4)	3.5(0.7~4.0)	5.0(0.8~5.3)	6.7(3.5~7.3)	
	Heating Capacity	Btu/h	10000(2600~13000)	13000(2600~16000)	18000(2800~19000)	24000(12000~27000)	
		kW	2.9(0.7~3.8)	3.8(0.7~4.7)	5.3(0.8~5.5)	7.0(3.5~7.9)	
Electrical Parts	Power Supply	V~,Hz,Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	
		Power Input (W)	Cooling 530(180~1100)	840(210~1250)	1440(350~1700)	2100(820~2500)	
	Heating	560(190~1150)	870(220~1300)	1210(300~1600)	1940(800~2700)		
	Operating Current (A)	Cooling	2.4(1.0~4.8)	3.7(1.1~5.5)	6.4(1.6~7.6)	9.4(3.6~11.2)	
Heating		2.6(1.1~5.0)	3.9(1.2~5.8)	5.5(1.4~7.2)	9.1(3.5~12.0)		
Performance	EER	W/W	5.0	4.2	3.46	3.21	
	COP	W/W	5.23	4.38	4.36	3.63	
	Energy Rate		A+/A+	A+/A+	A+/A+	A/A	
	Air Flow Volume (m³/h)	Indoor		750/600/450	780/600/450	950/750/500	1050/850/600
		Noise Level (dB(A))	Indoor(Hi/Med/Lo/Silent)	38/32/25/20	39/33/25/21	45/38/32/24	46/39/33/28
Outdoor			53	53	55	57	
Net Dimension & Weight	Indoor(mm)	WxHxD	830x250x316	830x250x316	950x250x316	950x250x316	
	Outdoor(mm)	WxHxD	760x590x285	760x590x285	760x590x285	845x695x335	
	Net Weight (kg)	Indoor/Outdoor	11/37	11/37	12.5/38	12.5/49.5	
Packing Dimension	Indoor(mm)	WxHxD	915x330x395	915x330x395	1035x330x395	1035x330x395	
	Outdoor(mm)	WxHxD	887x645x355	887x645x355	887x645x355	965x755x395	
	Gross Weight (kg)	Indoor/Outdoor	14/40	14/40	16/41	16/52.5	
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")	
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	40-64	50-88	
	Stuffing Quantity (Set)	20'/40'/40'/HQ	85/180/215	85/180/215	80/175/195	66/140/160	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



R410A 220-240V~, 50Hz
Super DC Inverter



DC Inverter 180° Sine Wave



















Midea DC Inverter Air-conditioner adopts the advanced 180° Sine Wave DC Inverter driving technology and Brushless DC (BLDC) motor (revolution variable) compressor. More energy-saving, more consistent, and quieter than 120° Square Wave DC Inverter:



3D DC Inverter



Besides the compressor motor, both of the indoor and outdoor fan motors are Brushless DC (BLDC) type. Owing to the function of BLDC motors, the 3D Inverter air conditioner gains higher efficiency and makes quieter operation which helps to save more energy and enhance comfort to consumers.

-  Auto Restart Function
-  Active Carbon Filter
-  Follow Me
-  LED Display
-  Sleep Mode
-  Self-cleaning
-  Turbo Mode
-  Temp Compensation
-  Two-direction Air Vane
-  Bio Filter
-  Golden Fin
-  Ionizer
-  Low Ambient Cooling
-  Plasma
-  Heating Belt (outdoor)
-  Silver Ion Filter
-  3M HAF Filter
-  Vitamin C Filter

Features: ■ Standard ■ Optional


Specification_X Series (Super DC Inverter)



	Indoor Unit	Outdoor Unit	MSX-07HRFN1-QE4 MOC-07HFN1-QE4	MSX-09HRFN1-QE0 MOC-09HFN1-QE0	MSX-12HRFN1-QD2 MOC-12HFN1-QD2	MSX-18HRFN1-QC4 MOC-18HFN1-QC4
Capacity	Cooling Capacity	Btu/h	7000(2600~11000)	9000(2600~11500)	12000(2600~13500)	17000(2800~18000)
		kW	2.1(0.7~3.2)	2.6(0.7~3.4)	3.5(0.7~4.0)	5.0(0.8~5.3)
	Heating Capacity	Btu/h	8000(2600~12500)	10000(2600~13000)	13000(2600~16000)	17500(2800~19000)
		kW	2.3(0.7~3.6)	2.9(0.7~3.8)	3.8(0.7~4.7)	5.1(0.8~5.5)
Electrical Parts	Power Supply	V~,Hz,Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph
		Power Input (W)	Cooling 380(150~1050)	530(180~1100)	840(210~1250)	1460(380~1750)
	Heating	420(160~1100)	560(190~1150)	870(220~1300)	1350(350~1700)	
	Operating Current (A)	Cooling	1.8(0.8~4.6)	2.4(1.0~4.8)	3.7(1.1~5.5)	6.4(1.7~7.6)
Heating		2.0(0.9~4.8)	2.6(1.1~5.0)	3.9(1.2~5.8)	6.0(1.6~7.4)	
Performance	EER	W/W	5.4	5.0	4.2	3.4
	COP	W/W	5.58	5.23	4.38	3.8
	Energy Rate		A+/A+	A+/A+	A+/A+	A+/A+
	Air Flow Volume (m³/h)	Indoor	800/700/600	820/700/600	820/720/620	850/750/620
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/31/25	39/32/26	39/33/27	41/33/27
		Outdoor	53	53	53	55
Net Dimension & Weight	Indoor(mm)	WxHxD	850x305x225	850x305x225	850x305x225	850x305x225
	Outdoor(mm)	WxHxD	760x590x285	760x590x285	760x590x285	760x590x285
	Net Weight (kg)	Indoor/Outdoor	10.5/37	10.5/37	10.5/37	10.5/37
Packing Dimension	Indoor(mm)	WxHxD	945x385x313	945x385x313	945x385x313	945x385x313
	Outdoor(mm)	WxHxD	887x645x355	887x645x355	887x645x355	887x645x355
	Gross Weight (kg)	Indoor/Outdoor	13.5/40	13.5/40	13.5/40	13.5/40
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	40-64	50-88
	Stuffing Quantity (Set)	20'/40'/40'HQ	85/180/205	85/180/205	85/180/205	85/180/205

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



 220-240V~, 50Hz
 Super DC inverter
 DC Inverter (COP:4.2)
 DC inverter
 ON/OFF
 Multi ON/OFF



Super Slim Design

With super slim indoor unit, the fashionable design brings great visual enjoyment as the home decoration.



Super Ionizer

Ionizer+ is a device that ionizes the air by positive and negative high voltage electrodes simultaneously. When the positive ions and negative ions neutralized it will release tremendous amounts of energy which can sterilize the air passed through and alter the structure of the bacteria nearby. Moreover, the residual negative ions not only eliminates odor, dust, smoke and pollen particles in the air, but also brings more fresh and healthy sensation to the users like staying in forest or closing to waterfall.



-  Auto Restart Function
-  Active Carbon Filter
-  Follow Me
-  Turbo Mode
-  Temp Compensation
-  Ionizer+
-  Self-cleaning
-  Sleep Mode
-  VLED Display
-  Bio Filter
-  Golden Fin
-  Heating Belt (outdoor)
-  Low Ambient Cooling
-  Silver Ion Filter
-  Vitamin C Filter
-  3M HAF Filter

Features: ■ Standard ■ Optional

Specification_Y Series (Super DC inverter)



	Indoor Unit	Outdoor Unit	MSY-09HRFN1-QD2 MOC-09HFN1-QD2	MSY-12HRFN1-QC8 MOC-12HFN1-QC8	
Capacity	Cooling Capacity	Btu/h	9000(3400~11200)	12000(3800~14800)	
		kW	2.6(1.0~3.3)	3.5(1.1~4.3)	
	Heating Capacity	Btu/h	10000(3500~12000)	13000(4000~15500)	
		kW	2.9(1.0~3.5)	3.8(1.2~4.5)	
Electrical Parts	Power Supply	V~Hz,Ph	220-240V~50Hz,1Ph	220-240V~50Hz,1Ph	
		Power Input (W)	Cooling 630(220~1000)	930(360~1480)	
		Heating 640(240~1100)	950(370~1560)		
	Operating Current (A)	Cooling	3.1(1.1~4.8)	4.2(1.6~6.6)	
Heating		3.2(1.2~5.0)	4.3(1.7~6.8)		
Performance	EER	W/W	4.21	3.81	
	COP	W/W	4.61	4.01	
	Energy Rate		A+/A+	A+/A+	
	Air Flow Volume (m³/h)	Indoor		670/470/400	670/470/400
		Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/28/24	39/28/24
	Outdoor			54	54
Net Dimension & Weight	Indoor(mm)	WxHxD	900x285x160	900x285x160	
	Outdoor(mm)	WxHxD	760x590x285	760x590x285	
	Net Weight (kg)	Indoor/Outdoor	10/38	10/39	
Packing Dimension	Indoor(mm)	WxHxD	990x375x250	990x375x250	
	Outdoor(mm)	WxHxD	887x645x355	887x645x355	
	Gross Weight (kg)	Indoor/Outdoor	12.5/41	12.5/42	
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	35-45	
	Stuffing Quantity (Set)	20'/40'/40'HQ	92/190/230	92/190/230	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
 2.The noise level date reflects the level in anechoic chamber.



Specification_Y Series DC Inverter (COP:4.2)

		Indoor Unit		Outdoor Unit		MSY-09HRDNI-QC8 MOC-09HDNI-QC8		MSY-12HRDNI-QC4 MOC-12HDNI-QC4	
Capacity	Cooling Capacity	Btu/h	9000(3100~11500)		12000(3800~14800)				
		kW	2.6(0.9~3.4)		3.5(1.1~4.3)				
	Heating Capacity	Btu/h	10000(3300~12500)		13000(4000~15500)				
		kW	2.9(0.9~3.6)		3.8(1.2~4.5)				
Electrical Parts	Power Supply	V~Hz,Ph	220-240V~.50Hz,1Ph		220-240V~.50Hz,1Ph				
	Power Input (W)	Cooling	690(280~1100)		1030(360~1480)				
		Heating	690(300~1150)		1000(340~1450)				
	Operating Current (A)	Cooling	3.1(1.3~4.8)		4.6(1.6~6.5)				
Heating		3.1(1.4~5.0)		4.5(1.7~6.4)					
Performance	EER	W/W	3.82		3.41				
	COP	W/W	4.25		3.81				
	Energy Rate		A+/A+		A+/A+				
	Air Flow Volume (m³/h)	Indoor	600/500/400		600/500/400				
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/34/28		38/34/28				
		Outdoor	54		54				
Net Dimension & Weight	Indoor(mm)	WxHxD	900x285x160		900x285x160				
	Outdoor(mm)	WxHxD	760x590x285		760x590x285				
	Net Weight (kg)	Indoor/Outdoor	9/38.5		9/39				
	Packing Dimension	Indoor(mm)	WxHxD	990x375x250		990x375x250			
Outdoor(mm)		WxHxD	887x645x355		887x645x355				
Gross Weight (kg)		Indoor/Outdoor	11.5/41		11.5/41.5				
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")		Ø6.35 (1/4")				
	Gas(mm(inch))		Ø9.53 (3/8")		Ø12.7 (1/2")				
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35		30-45				
	Stuffing Quantity (Set)	20'/40'/40'HQ	92/190/230		92/190/230				

Specification_Y Series (DC inverter)

		Indoor Unit		Outdoor Unit		MSY-09HRDNI-QC2(A) MOR-09HDNI-QC2		MSY-12HRDNI-QC2(A) MOR-12HDNI-QC2		MSY-18HRDNI-QC2(B) MOC-18HDNI-QC2	
Capacity	Cooling Capacity	Btu/h	9000(3300~11200)		12000(4100~13800)		17000(6000~20000)				
		kW	2.6(0.6~3.3)		3.5(1.2~4.0)		5.0(1.7~5.8)				
	Heating Capacity	Btu/h	10000(4000~13000)		13000(4400~16000)		18000(6400~22000)				
		kW	2.9(1.2~3.8)		3.8(1.3~4.7)		5.3(1.8~6.4)				
Electrical Parts	Power Supply	V~Hz,Ph	220-240V~.50Hz,1Ph		220-240V~.50Hz,1Ph		220-240V~.50Hz,1Ph				
	Power Input (W)	Cooling	820(240~1200)		1090(360~1400)		1550(530~2040)				
		Heating	810(240~1250)		1050(350~1420)		1460(480~2000)				
	Operating Current (A)	Cooling	3.7(1.2~5.3)		4.9(1.8~6.5)		6.8(2.4~9.2)				
Heating		3.6(1.2~5.6)		4.7(1.7~6.6)		6.5(2.3~9.0)					
Performance	EER	W/W	3.21		3.21		3.22				
	COP	W/W	3.61		3.61		3.61				
	Energy Rate		A/A		A/A		A/A				
	Air Flow Volume (m³/h)	Indoor	570/490/420		650/520/440		870/730/520				
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/32/25		39/32/25		43/37/32					
	Outdoor	52		52		56					
Net Dimension & Weight	Indoor(mm)	WxHxD	850x275x160		900x285x160		1022x295x185				
	Outdoor(mm)	WxHxD	660x540x255		660x540x255		760x590x285				
	Net Weight (kg)	Indoor/Outdoor	8.5/27.5		9/29		12/40.5				
Packing Dimension	Indoor(mm)	WxHxD	940x250x365		990x375x250		1105x385x275				
	Outdoor(mm)	WxHxD	770x585x325		887x645x355		887x645x355				
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø6.35 (1/4")				
	Gas(mm(inch))		Ø9.53 (3/8")		Ø9.53 (3/8")		Ø12.7 (1/2")				
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35		30-45		40-64				
	Stuffing Quantity (Set)	20'/40'/40'HQ	123/262/300		123/260/290		85/188/215				

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Specification_Y Series (ON/OFF)

		Indoor Unit		Outdoor Unit		MSY-07HRNI-QC2 MOB-07HNI-QC2		MSY-09HRNI-QC2 MOB-09HNI-QC2		MSY-12HRNI-QC2 MOB1-12HNI-QC2		MSY-18HRNI-QC2 MOF-18HNI-QC2	
Capacity	Cooling Capacity	Btu/h	7000		9000		12000		17000				
		kW	2.1		2.6		3.5		5.0				
	Heating Capacity	Btu/h	8000		10000		13000		18000				
		kW	2.3		2.9		3.8		5.3				
Electrical Parts	Power Supply	V~Hz,Ph	220-240, 50, 1		220-240, 50, 1		220-240, 50, 1		220-240, 50, 1				
	Power Input (W)	Cooling	640		820		1090		1555				
		Heating	650		810		1050		1465				
	Operating Current (A)	Cooling	2.8		3.6		5.0		7.0				
Heating		2.9		3.5		4.8		6.6					
Performance	EER	W/W	3.21		3.22		3.22		3.21				
	COP	W/W	3.61		3.61		3.63		3.61				
	Energy Rate		A/A		A/A		A/A		A/A				
	Air Flow Volume (m³/h)	Indoor	450		550		650		850				
		Outdoor	52		53		54		56				
Net Dimension & Weight	Indoor(mm)	WxHxD	850x275x160		850x275x160		900x285x160		1022x295x185				
	Outdoor(mm)	WxHxD	780x540x250		780x540x250		780x540x250		845x695x335				
	Net Weight (kg)	Indoor/Outdoor	8.5/24.5		8.5/27.5		10/32.5		12.5/43				
Packing Dimension	Indoor(mm)	WxHxD	940x250x365		940x250x365		990x375x250		1105x385x275				
	Outdoor(mm)	WxHxD	910x575x335		910x575x335		910x575x335		965x755x395				
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø6.35 (1/4")				
	Gas(mm(inch))		Ø9.53 (3/8")		Ø9.53 (3/8")		Ø9.53 (3/8")		Ø12.7 (1/2")				
Applicable Area & Stuffing Quantity	Applicable Area (m²)		14-23		25-32		27-42		35-60				
	Stuffing Quantity (Set)	20'/40'/40'HQ	114/226/262		114/226/262		109/233/264		70/147/166				

Specification_Y Series Multi (ON/OFF)

		Indoor Unit		Outdoor Unit		MSYI-09HRNI		MSYI-12HRNI	
Performance	Cooling/Heating	Btu/h	9000/10000		12000/13000				
	Air Flow	m³/h	550		650				
	Noise Level	Hi/Med/Lo	38/35/32		40/37/34				
	Net Dimension (mm)	WxHxD	850x275x160		900x285x160				
	Packing Dimension (mm)	WxHxD	940x365x250		990x375x250				
	Net/Gross Weight	kg	8.5/10.5		9/11				
Liquid/Gas Side	mm	Ø6.35/Ø9.53		Ø6.35/Ø12.7					

		Outdoor Unit		M20A-18HRNI		M20A-21HRNI		M20A-24HRNI		M30C-27HRNI-Q		M30C-30HRNI-Q	
Capacity	Cooling Capacity	Btu/h	9000x2		9000+12000		12000+12000		9000x3		9000x2+12000		
	Heating Capacity	Btu/h	10000x2		10000+14000		13000+13000		10000x3		10000x2+14000		
Electrical Parts	Power Supply	V~Hz,Ph	220-240,50,1		220-240,50,1		220-240,50,1		220-240,50,1		220-240,50,1		
	Power Input (W)	Cooling/Heating	840x2/840x2		850+1150/860+1190		1160x2/1170x2		1600+970/1700+1000		1800+1080/1900+1170		
	Operating Current (A)	Cooling/Heating	4.0x2/4.0x2		4.0+5.7/4.1+5.7		5.3x2/5.4x2		8.0+5.1/8.1+5.2		8.3+5.4/8.6+5.6		
Dimension & Weight	EER/COP	W/W	3.10-B/3.45-B		3.04-B/3.42-B		3.01-B/3.24-C		3.03-B/3.22-C		3.02-B/3.22-C		
	Net Dimension (mm)	WxHxD	895x655x345		895x655x345		860x830x330		860x830x330		860x830x330		
	Packing Dimension (mm)	WxHxD	1045x700x470		1045x700x470		985x895x425		985x895x425		985x895x425		
	Net/Gross Weight	kg	60/65		63/68		72.5/77		78/82		80/83		
	Air Flow	m³/h	2200		2200		3200		3200		3200		
Noise Level	dB(A)	56		56		58		58		58			

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



R410A 220-240V~, 50Hz

- Super DC inverter
- DC Inverter (COP:4.2)
- DC inverter
- ON/OFF
- Multi ON/OFF







Split

Color Panel

Planar and concise design, various technological polymethylmethacrylate (PMMA) material's color.

Available Colors:

-  Dark Red (HJ-826)
-  Dark Blue (HJ-823)
-  Black(Black mirror)
-  Silver Gray (HJ-816)



Ionizer



Midea air conditioners takes advantage of Ionizer Technology to bring the refreshing air to your home.

- | | | |
|--|---|---|
|  Auto Restart Function |  Active Carbon Filter |  Follow Me |
|  Golden Fin |  LCD Display |  Ionizer |
|  Self-cleaning |  Sleep Mode |  Temp Compensation |
|  Two-direction Air Vane |  Turbo Mode |  Bio Filter |
|  Heating Belt (outdoor) |  Low Ambient Cooling |  Silver Ion Filter |
|  Vitamin C Filter |  3M HAF Filter | |

Features: ■ Standard ■ Optional

Specification_Vertu Series (Super DC inverter)

SUPER
DC INVERTER

	Indoor Unit	Outdoor Unit	MSV1-09HRFN1-ND2E MOC-09HRFN1-ND2E	MSV1-12HRFN1-ND0E MOCI-12HRFN1-ND0E
Capacity	Cooling Capacity	Btu/h	9000(3400-11200)	11000(4000-13500)
		kW	2.6(1.0-3.3)	3.2(1.2-4.0)
	Heating Capacity	Btu/h	10000(3500-12000)	12000(4200-14500)
		kW	2.9(1.0-3.5)	3.5(1.3-4.2)
Electrical Parts	Power Supply	V~Hz,Ph	220-240, 50/60, 1	220-240, 50/60, 1
	Power Input (W)	Cooling	630(220-1000)	800(280-1220)
		Heating	700(240-1100)	880(300-1300)
	Operating Current (A)	Cooling	3.2(1.1-4.8)	4.0(1.4-6.0)
Heating		3.5(1.2-5.4)	4.3(1.5-6.4)	
Performance	EER	W/W	4.2	4.0
	COP	W/W	4.2	4.0
	Energy Rate		A+/A+	A+/A+
	Air Flow Volume (m ³ /h)	Indoor	680	680
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/33/28	39/33/29	
	Outdoor	54	54	
Net Dimension & Weight	Indoor(mm)	WxHxD	845x286x165	845x286x165
	Outdoor(mm)	WxHxD	760x590x285	760x590x285
	Net Weight (kg)	Indoor/Outdoor	9/41	10/42
Packing Dimension	Indoor(mm)	WxHxD	905x355x285	905x355x285
	Outdoor(mm)	WxHxD	887x645x355	887x645x355
	Gross Weight (kg)	Indoor/Outdoor	11/44	12/44.5
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")
	Gas(mm(inch))		Ø9.53 (3/8")	Ø12.7 (1/2")
Applicable Area & Stuffing Quantity	Applicable Area (m ²)		25-35	30-45
	Stuffing Quantity (Set)		20/140/140/HQ	97/192/240

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



Specification_Vertu Series DC Inverter (COP:4.2)

		Indoor Unit	MSV1-09HRDNI-QC8	MSV1-12HRDNI-QC4
		Outdoor Unit	MOC-09HDNI-QC8	MOC-12HDNI-QC4
Capacity	Cooling Capacity	Btu/h	9000(3100-11500)	12000(3800-14800)
		kW	2.6(0.9-3.4)	3.5(1.1-4.4)
	Heating Capacity	Btu/h	10000(3300-12500)	13000(4000-15500)
		kW	2.9(1.0-3.7)	3.8(1.2-4.5)
Electrical Parts	Power Supply	V~Hz,Ph	220-240, 50, 1	220-240, 50, 1
		Power Input (W)	Cooling 690(280-1100)	1030(360-1480)
	Heating	690(300-1150)	1000(340-1450)	
	Operating Current (A)	Cooling	3.1(1.3-4.8)	4.6(1.6-6.5)
Heating		3.1(1.4-5.0)	4.5(1.7-6.4)	
Performance	EER	W/W	3.82	3.41
	COP	W/W	4.25	3.81
	Energy Rate		A+/A+	A+/A+
	Air Flow Volume (m³/h)	Indoor	650	680
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/34/29	39/35/29
		Outdoor	54	54
Net Dimension & Weight	Indoor(mm)	WxHxD	845x286x165	845x286x165
	Outdoor(mm)	WxHxD	760x590x285	760x590x285
	Net Weight (kg)	Indoor/Outdoor	10/38.5	10/39
Packing Dimension	Indoor(mm)	WxHxD	905x355x285	905x355x285
	Outdoor(mm)	WxHxD	887x645x355	887x645x355
	Gross Weight (kg)	Indoor/Outdoor	13/41	13/41.5
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")
	Gas(mm(inch))		Ø9.53 (3/8")	Ø12.7 (1/2")
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45
	Stuffing Quantity (Set)	20'/40'/40'HQ	97/192/240	97/192/240

Specification_Vertu Series (DC inverter)

		Indoor Unit	MSV1-09HRDNI-QC2	MSV1-12HRDNI-QC2	MSV1-18HRDNI-QC2F(C)	MSV1-24HRDNI-QC2W
		Outdoor Unit	MOR-09HDNI-QC2	MOR-12HDNI-QC2	MOC-18HDNI-QC2	MOF-24HDNI-QC2W
Capacity	Cooling Capacity	Btu/h	9000(2050~11200)	12000(4000~13800)	17000(5100-22000)	23000(12000~25000)
		kW	2.6(0.6-3.3)	3.5(1.2-4.0)	5.0(1.5-6.4)	6.7(3.5~7.3)
	Heating Capacity	Btu/h	10000(3200~13200)	13000(4100~14500)	17500(5300-23000)	25000(11000~27000)
		kW	2.9(0.9-3.8)	3.8(1.2-4.2)	5.1(1.6-6.7)	7.3(3.2~7.9)
Electrical Parts	Power Supply	V~Hz,Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240V~50Hz, 1Ph
		Power Input (W)	Cooling 820(230~1070)	1090(350~1170)	1550(380-2300)	2100(820~2500)
	Heating	810(230~960)	1050(350~1100)	1420(350-2100)	2030(800~2700)	
	Operating Current (A)	Cooling	3.6(1.0~4.7)	4.8(1.5~5.0)	6.9(1.8-10.2)	9.4(3.6~11.2)
Heating		3.5(1.0~4.2)	4.6(1.5~4.8)	6.4(1.6-9.5)	9.1(3.5~12.0)	
Performance	EER	W/W	3.22	3.23	3.21	3.21
	COP	W/W	3.62	3.63	3.61	3.61
	Energy Rate		A/A	A/A	A/A	A/A
	Air Flow Volume (m³/h)	Indoor	550	650	800	1150
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/33/28	39/35/28	42/37/33	47/44/40	
	Outdoor	52	52	56	58	
Net Dimension & Weight	Indoor(mm)	WxHxD	795x270x165	845x286x165	995x292x194	1080x320x200
	Outdoor(mm)	WxHxD	660x540x255	660x540x255	760x590x285	845x695x335
	Net Weight (kg)	Indoor/Outdoor	9.5/27.5	10/29	11/40.5	14.5/49.5
Packing Dimension	Indoor(mm)	WxHxD	850x340x285	905x355x285	1100x415x290	1180x425x310
	Outdoor(mm)	WxHxD	770x585x325	770x585x325	887x645x355	965x755x395
	Gross Weight (kg)	Indoor/Outdoor	12.5/29.5	13.5/31	15/43	20/52.5
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	40-64	50-88
	Stuffing Quantity (Set)	20'/40'/40'HQ	136/295/324	130/275/310	84/171/209	66/130/145

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level data reflects the level in anechoic chamber.

Specification_Vertu Series (ON/OFF)

		Indoor Unit	MSV1-07HRNI	MSV1-09HRNI	MSV1-12HRNI-QC2	MSV1-18HRNI-QC2F	MSV1-21HRNI-QB8FW	MSV1-24HRNI-QB8FW
		Outdoor Unit	MOA-07HNI	MOB-09HNI	MOB1-12HNI-QC2	MOF-18HNI-QC2F	MOF1-21HNI-QC0F	MOF3-24HNI-QB8FW
Capacity	Cooling Capacity	Btu/h	7000	9000	12000	18000	21000	24000
		kW	2.1	2.6	3.5	5.3	6.2	7.0
	Heating Capacity	Btu/h	8000	10300	13000	19000	23000	25000
		kW	2.3	3.0	3.8	5.6	6.7	7.3
Electrical Parts	Power Supply	V~Hz,Ph	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1
		Power Input (W)	Cooling	640	820	1090	1640	2190
	Heating	650	840	1050	1540	2240	2280	
	Operating Current (A)	Cooling	2.8	3.6	4.8	7.4	10.0	11.5
Heating		2.9	3.7	4.6	7.0	10.5	10.4	
Performance	EER	W/W	3.21	3.22	3.22	3.21	2.81	2.81
	COP	W/W	3.61	3.61	3.63	3.61	3.01	3.21
	Energy Rate		A/A	A/A	A/A	A/A	C/C	C/C
	Air Flow Volume (m³/h)	Indoor	470	580	670	830	1070	1200
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	36/34/30	37/35/32	41/37/34	43/38/35	46/42/38	48/45/41	
	Outdoor	54	54	55	56	59	60	
Net Dimension & Weight	Indoor(mm)	WxHxD	795x270x165	795x270x165	845x286x165	995x292x194	1082x320x207	1082x320x207
	Outdoor(mm)	WxHxD	700x535x235	780x540x250	780x540x250	845x695x335	845x695x335	845x695x335
	Net Weight (kg)	Indoor/Outdoor	10/28.5	10/31	10.5/32.5	12.5/44	15/56	15/53
Packing Dimension	Indoor(mm)	WxHxD	850x335x285	850x335x285	905x355x285	1100x415x290	1180x425x310	1180x425x310
	Outdoor(mm)	WxHxD	815x325x580	910x335x575	910x335x575	965x755x395	965x755x395	965x755x395
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")	Ø9.53 (3/8")
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")	Ø16.0 (5/8")
Applicable Area & Stuffing Quantity	Applicable Area (m²)		14-23	23-32	27-42	35-60	40-70	45-82
	Stuffing Quantity (Set)	20'/40'/40'HQ	120/258/292	115/226/268	108/220/258	69/140/166	64/134/150	64/134/150

Specification_Vertu Series Multi (ON/OFF)

		Indoor Unit	MSV11-09HRNI	MSV11-12HRNI
Performance	Cooling/Heating	Btu/h	9000/10000	12000/13000
	Air Flow	m³/h	550	650
	Noise Level	Hi/Med/Lo	38/35/32	40/37/34
	Net Dimension (mm)	WxHxD	795x270x165	845x286x165
	Packing Dimension (mm)	WxHxD	850x340x285	905x355x285
	Net/Gross Weight	kg	10/11.5	10.5/12
Liquid/Gas Side	mm	Ø6.35/Ø9.53	Ø6.35/Ø12.7	

		Outdoor Unit	M2OA-18HRNI	M2OA-21HRNI	M2OA-24HRNI	M3OC-27HRNI-Q	M3OC-30HRNI-Q
Capacity	Cooling Capacity	Btu/h	9000x2	9000+12000	12000+12000	9000x3	9000x2+12000
	Heating Capacity	Btu/h	10000x2	10000+14000	13000+13000	10000x3	10000x2+14000
Electrical Parts	Power Supply	V~Hz,Ph	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1
	Power Input (W)	Cooling/Heating	840x2/840x2	850+1150/860+1190	1160x2/1170x2	1600+970/1700+1000	1800+1080/1900+1170
	Operating Current (A)	Cooling/Heating	4.0x2/4.0x2	4.0+5.7/4.1+5.7	5.3x2/5.4x2	8.0+5.1/8.1+5.2	8.3+5.4/8.6+5.6
Dimension & Weight	EER/COP	W/W	3.10-B/3.45-B	3.04-B/3.42-B	3.01-B/3.24-C	3.03-B/3.22-C	3.02-B/3.22-C
	Net Dimension (mm)	WxHxD	895x655x345	895x655x345	860x830x330	860x830x330	860x830x330
	Packing Dimension (mm)	WxHxD	1045x700x470	1045x700x470	985x895x425	985x895x425	985x895x425
	Net/Gross Weight	kg	60/65	63/68	72.5/77	78/82	80/83
	Air Flow	m³/h	2200	2200	3200	3200	3200
	Noise Level	dB(A)	56	56	58	58	58

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level data reflects the level in anechoic chamber.



R410A 220-240V~, 50Hz

Super DC inverter
DC Inverter (COP:4.2)
DC inverter
ON/OFF
Multi ON/OFF



Split

Follow Me

With this function, the room temperature sensor built in remote control is activated and replaces the sensor of in indoor unit. Then the air conditioner will control the room temperature based on the temperature around the remote controll, just like the air conditioner is following the user.



Self Clean



When this function has been activated, the indoor unit operates as cooling mode with low fan speed initially. Then during this period the condensed water will take some dust on evaporator fins away. After that the unit turns to heating operation with low fan speed which dries the inside of indoor unit. Finally it turns to fan-only mode and blows away the wet air. The whole process cleans the internal side of indoor unit and prevents the aspiration of bacteria.

- | | | | |
|-----------------------|----------------------|------------------------|---------------|
| Auto Restart Function | Active Carbon Filter | Sleep Mode | Self-cleaning |
| Follow Me | Turbo Mode | Temp Compensation | VLED Display |
| Bio Filter | Golden Fin | Heating Belt (outdoor) | Ionizer |
| Low Ambient Cooling | Silver Ion Filter | Vitamin C Filter | 3M HAF Filter |

Features: ■ Standard ■ Optional

Specification_Vida Series (Super DC inverter)



	Indoor Unit Outdoor Unit		MS9V-09HRFNI-QD2E MOC-09HFN1-QD2E	MS9V-12HRFNI-QD0E MOC-12HFN1-QD0E	
Capacity	Cooling Capacity	Btu/h	9000(3400~11200)	11000(4000~13500)	
		kW	2.6(1.0~3.3)	3.2(1.2~4.0)	
	Heating Capacity	Btu/h	10000(3500~12000)	12000(4200~14500)	
		kW	2.9(1.0~3.5)	3.5(1.2~4.2)	
Electrical Parts	Power Supply	V~,Hz,Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	
	Power Input (W)	Cooling	630(220~1000)	800(280~1220)	
		Heating	700(240~1100)	880(300~1300)	
	Operating Current (A)	Cooling	3.2(1.1~4.8)	4.0(1.4~6.0)	
		Heating	3.5(1.2~5.4)	4.3(1.5~6.4)	
	Performance	EER	W/W	4.2	4.0
COP		W/W	4.2	4.0	
Energy Rate			A+/A+	A+/A+	
Air Flow Volume (m³/h)		Indoor		550/480/400	580/500/440
		Noise Level (dB(A))	Indoor(Hi/Med/Lo)	37/32/25	38/33/27
Outdoor				53	53
Net Dimension & Weight	Indoor(mm)	WxHxD	845x290x165	845x290x165	
	Outdoor(mm)	WxHxD	760x590x285	760x590x285	
	Net Weight (kg)	Indoor/Outdoor	8.5/37.5	8.5/38	
Packing Dimension	Indoor(mm)	WxHxD	920x365x240	920x365x240	
	Outdoor(mm)	WxHxD	887x645x355	887x645x355	
	Gross Weight (kg)	Indoor/Outdoor	10.5/40	10.5/41	
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	
	Stuffing Quantity (Set)	20'/40'/40'HQ	95/200/240	95/200/240	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



Specification_Vida Series DC Inverter (COP:4.2)

Indoor Unit Outdoor Unit		MS9V-09HRDNI-QC8 MOC1-09HDNI-QC8	MS9V-12HRDNI-QC4 MOC1-12HDNI-QC4	
Capacity	Cooling Capacity	Btu/h 9000(3100~11500)	12000(3800~14800)	
		kW 2.6(0.9~3.4)	3.5(1.1~4.3)	
Heating Capacity	Btu/h	10000(3300~12500)	13000(4000~15500)	
	kW	2.9(0.9~3.6)	3.8(1.2~4.5)	
Electrical Parts	Power Supply	V~,Hz,Ph 220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	
	Power Input (W)	Cooling 690(280~1100)	1030(360~1480)	
		Heating 690(300~1150)	1000(340~1450)	
	Operating Current (A)	Cooling 3.1(1.3~4.8)	4.6(1.6~6.5)	
	Heating 3.1(1.4~5.0)	4.5(1.7~6.4)		
Performance	EER	W/W 3.81	3.41	
	COP	W/W 4.21	3.81	
	Energy Rate	A+/A+	A+/A+	
	Air Flow Volume (m³/h)	Indoor 550/480/400	580/500/440	
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/32/26	39/33/27
		Outdoor	54	54
Net Dimension & Weight	Indoor(mm)	WxHxD 845x290x165	845x290x165	
	Outdoor(mm)	WxHxD 760x590x285	760x590x285	
	Net Weight (kg)	Indoor/Outdoor 8.5/38.5	9/39	
Packing Dimension	Indoor(mm)	WxHxD 920x365x240	920x365x240	
	Outdoor(mm)	WxHxD 887x645x355	887x645x355	
	Gross Weight (kg)	Indoor/Outdoor 10.5/41	11/41.5	
Piping Size	Liquid(mm(inch))	Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))	Ø9.53 (3/8")	Ø9.53 (3/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)	25-35	30-45	
	Stuffing Quantity (Set)	20'/40'/40'HQ	95/200/240	

Specification_Vida Series (DC inverter)

Indoor Unit Outdoor Unit		MS9V-09HRDNI-QC2 MOR-09HDNI-QC2	MS9V-12HRDNI-QC2 MOR-12HDNI-QC2	MS9V-18HRDNI-QC2 MOC-18HDNI-QC2	MS9V-24HRDNI-QC2W MOF-24HDNI-QC2W
Capacity	Cooling Capacity	Btu/h 9000(2050~11200)	12000(4000~13800)	17000(5100~22000)	23000(12000~25000)
		kW 2.6(0.6~3.3)	3.5(1.2~4.0)	5.0(1.5~6.4)	6.7(3.5~7.3)
	Heating Capacity	Btu/h 10000(3200~13200)	13000(4100~14500)	18000(6400~22000)	25000(11000~27000)
		kW 2.9(0.9~3.9)	3.8(1.2~4.2)	5.3(1.8~6.4)	7.3(3.2~7.9)
Electrical Parts	Power Supply	V~,Hz,Ph 220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph	220-240V~,50Hz,1Ph
	Power Input (W)	Cooling 820(230~1070)	1090(350~1170)	1550(350~2300)	2100(820~2500)
		Heating 810(230~960)	1050(350~1100)	1460(480~2000)	2030(800~2700)
	Operating Current (A)	Cooling 3.6(1.0~4.7)	4.8(1.5~5.0)	6.9(1.8~10.2)	9.4(3.6~11.2)
	Heating 3.5(1.0~4.2)	4.6(1.5~4.8)	6.6(2.3~9.0)	9.1(3.5~12.0)	
Performance	EER	W/W 3.22	3.23	3.21	3.21
	COP	W/W 3.62	3.63	3.61	3.61
	Energy Rate	A/A	A/A	A/A	A/A
	Air Flow Volume (m³/h)	Indoor 550/480/400	580/500/440	720/600/530	1200/1050/900
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	38/32/26	39/33/27	40/34/28
Outdoor		52	52	56	57
Net Dimension & Weight	Indoor(mm)	WxHxD 845x290x165	845x290x165	995x292x200	1075x312x221
	Outdoor(mm)	WxHxD 660x540x255	660x540x255	760x590x285	845x695x335
	Net Weight (kg)	Indoor/Outdoor 8.5/27.5	9/29	11.5/39.5	13/49.5
Packing Dimension	Indoor(mm)	WxHxD 920x365x240	920x365x240	1070x370x275	1160x400x315
	Outdoor(mm)	WxHxD 770x585x325	770x585x325	887x645x355	965x755x395
	Gross Weight (kg)	Indoor/Outdoor 10.5/29.5	11/31	14/42	17/52.5
Piping Size	Liquid(mm(inch))	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")
	Gas(mm(inch))	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")
Applicable Area & Stuffing Quantity	Applicable Area (m²)	25-35	30-45	40-64	50-88
	Stuffing Quantity (Set)	20'/40'/40'HQ	130/275/310	130/275/310	90/190/225

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Specification_Vida Series (ON/OFF)

Indoor Unit Outdoor Unit		MS9V-07HRNI-QC2 MOK1-07HNI-QC2	MS9V-09HRNI-QC2 MOA1-09HNI-QC2	MS9V-12HRNI-QC2 MOB1-12HNI-QC2	MS9V-18HRNI-QC0 MOC-18HNI-QC0	MS9V-21HRNI-QB8W MOP-21HNI-QB8W	MS9V-24HRNI-QB8W MOFI-24HNI-QB8W
Capacity	Cooling Capacity	Btu/h 7000	9000	12000	17000	21000	24000
		kW 2.1	2.6	3.5	5.0	6.2	7.0
	Heating Capacity	Btu/h 8000	9500	14000	18000	23000	26000
		kW 2.3	2.8	4.1	5.3	6.3	7.6
Electrical Parts	Power Supply	V~,Hz,Ph 220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
	Power Input (W)	Cooling 640	820	1090	1660	2190	2500
		Heating 650	770	1130	1550	2100	2360
	Operating Current (A)	Cooling 2.8	3.7	4.9	7.5	9.5	11.0
	Heating 2.9	3.4	5.1	7.0	9.0	10.5	
Performance	EER	W/W 3.21	3.21	3.21	3.01	2.81	2.81
	COP	W/W 3.61	3.61	3.61	3.41	3.21	3.21
	Energy Rate	A/A	A/A	A/A	B/B	C/C	C/C
	Air Flow Volume (m³/h)	Indoor 430	470	560	810	1030	1150
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	33/29/26	34/30/27	40/35/29	41/36/30	46/43/37
Outdoor		52	54	54	57	62	62
Net Dimension & Weight	Indoor(mm)	WxHxD 845x165x290	845x165x290	845x165x290	995x200x292	1080x225x320	1080x225x320
	Outdoor(mm)	WxHxD 685x260x430	700x235x535	780x250x540	760x285x590	820x345x600	845x335x695
	Net Weight (kg)	Indoor/Outdoor 9/24	9/24.5	9/32.5	11.5/38.5	14/51	14/52
Packing Dimension	Indoor(mm)	WxHxD 920x240x365	920x240x365	920x240x365	1070x370x275	1160x400x315	1160x400x315
	Outdoor(mm)	WxHxD 795x345x495	815x325x580	910x335x575	887x355x645	940x415x645	965x395x755
	Gross Weight (kg)	Indoor/Outdoor 11/26.5	11/26.5	11/35	14.5/41	17.5/56	17.5/57
Piping Size	Liquid(mm(inch))	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")	Ø9.53 (3/8")
	Gas(mm(inch))	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")	Ø16.0 (5/8")
Applicable Area & Stuffing Quantity	Applicable Area (m²)	14-23	23-32	27-42	35-60	40-70	45-82
	Stuffing Quantity (Set)	20'/40'/40'HQ	127/279/322	125/263/295	111/237/279	91/191/225	70/150/167

Specification_Vida Series Multi (ON/OFF)

Indoor Unit		MS9VI-09HRNI-Q	MS9VI-12HRNI-Q
Performance	Cooling/Heating	Btu/h 9000/10000	12000/13000
	Air Flow	m³/h 550	650
	Noise Level	Hi/Med/Lo 38/35/32	40/37/34
	Net Dimension (mm)	WxHxD 850x290x165	850x290x165
	Packing Dimension (mm)	WxHxD 920x365x240	920x365x240
	Net/Gross Weight	kg 7.5/9	9/11
Liquid/Gas Side	mm Ø6.35/Ø9.53	Ø6.35/Ø9.53	

Outdoor Unit		M20A-18HRNI	M20A-21HRNI	M20A-24HRNI	M30C-27HRNI-Q	M30C-30HRNI-Q
Capacity	Cooling Capacity	Btu/h 9000x2	9000+12000	12000+12000	9000x3	9000x2+12000
	Heating Capacity	Btu/h 10000x2	10000+14000	13000+13000	10000x3	10000x2+14000
Electrical Parts	Power Supply	V~,Hz,Ph 220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1
	Power Input (W)	Cooling/Heating 840x2/840x2	850+1150/860+1190	1160x2/1170x2	1600+970/1700+1000	1800+1080/1900+1170
	Operating Current (A)	Cooling/Heating 4.0x2/4.0x2	4.0+5.7/4.1+5.7	5.3x2/5.4x2	8.0+5.1/8.1+5.2	8.3+5.4/8.6+5.6
Dimension & Weight	EER/COP	W/W 3.10-B/3.45-B	3.04-B/3.42-B	3.01-B/3.24-C	3.03-B/3.22-C	3.02-B/3.22-C
	Net Dimension (mm)	WxHxD 895x655x345	895x655x345	860x830x330	860x830x330	860x830x330
	Packing Dimension (mm)	WxHxD 1045x700x470	1045x700x470	985x895x425	985x895x425	985x895x425
	Net/Gross Weight	kg 60/65	63/68	72.5/77	78/82	80/83
	Air Flow	m³/h 2200	2200	3200	3200	3200
	Noise Level	dB(A) 56	56	58	58	58

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



220-240V~, 50Hz

- Super DC inverter
- DC Inverter (COP:4.2)
- DC inverter
- ON/OFF
- Multi ON/OFF



Split

Electronic Expansion Valve

Compared with conventional throttling by utilizing capillary, Electronic Expansion Valve (EEV) makes the refrigerant volume reasonable in the air conditioner system. Under the control of microcomputer, this device throttles up or down the refrigerant precisely according to the actual load situation, which optimizes the use of heat exchanger and improves energy efficiency. Furthermore, EEV extends the flexibility of the air conditioner; improves the performance under different temperature condition especially heating operation in extreme low temperature, also makes the room temperature control more precise.



Freeze Protection (8°C Heating)

In heating operation, the preset temperature of the air conditioner can be as low as 8°C, which keeps the room temperature steady at 8°C and prevents household from freezing when the house is vacant for a long time in severe cold weather.



- | | | |
|-----------------------|----------------------|------------------------|
| Auto Restart Function | Active Carbon Filter | LED Display |
| Sleep Mode | Turbo Mode | Temp Compensation |
| Bio Filter | Golden Fin | Heating Belt (outdoor) |
| Low Ambient Cooling | Ionizer | Silver Ion Filter |
| Vitamin C Filter | 3M HAF Filter | |
- Features: ■ Standard ■ Optional

Specification_Luna Series (Super DC inverter)



	Indoor Unit Outdoor Unit		MS9A-09HRFNI-QD2E MOC1-09HFNI-QD2E	MS9A-12HRFNI-QD2E MOF-12HFNI-QD2E	
Capacity	Cooling Capacity	Btu/h	9000(3500~13800)	12000(3800~14800)	
		kW	2.6(1.0~4.0)	3.5(1.1~4.3)	
	Heating Capacity	Btu/h	10000(3800~14500)	13000(4000~15500)	
		kW	2.9(1.1~4.2)	3.8(1.2~4.5)	
Electrical Parts	Power Supply	V~Hz,Ph	220-240V~50Hz,1Ph	220-240V~50Hz,1Ph	
	Power Input (W)	Cooling	630(320~1360)	840(360~1480)	
		Heating	640(330~1470)	870(370~1560)	
	Operating Current (A)	Cooling	3.1(1.4~5.9)	3.8(1.6~6.6)	
		Heating	3.2(1.5~6.4)	4.0(1.7~6.8)	
	Performance	EER	W/W	4.2	4.2
COP		W/W	4.58	4.38	
		Energy Rate		A+/A+	A+/A+
Air Flow Volume (m³/h)		Indoor		620/520/400	800/700/600
		Noise Level (dB(A))	Indoor(Hi/Med/Lo)	40/35/28	43/39/33
Outdoor				54	55
Net Dimension & Weight		Indoor(mm)	WxHxD	790x265x198	918x292x223
	Outdoor(mm)	WxHxD	760x590x285	845x695x335	
	Net Weight (kg)	Indoor/Outdoor	9/39	11.5/47	
Packing Dimension	Indoor(mm)	WxHxD	875x335x265	1015x368x295	
	Outdoor(mm)	WxHxD	887x645x355	965x755x395	
	Gross Weight (kg)	Indoor/Outdoor	11/42	15/51	
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	
	Stuffing Quantity (Set)	20/40/40/HQ	95/202/245	72/150/170	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



Specification_Luna Series DC Inverter (COP:4.2)

		Indoor Unit		MS9A-09HRDNI-QD0		MS9A-12HRDNI-QC6	
		Outdoor Unit		MOC-09HDNI-QD0		MOC-12HDNI-QC6	
Capacity	Cooling Capacity	Btu/h	9000(3200~11500)		12000(3800~14000)		
		kW	2.6(0.9~3.4)		3.5(1.1~4.1)		
	Heating Capacity	Btu/h	10000(3200~12000)		13000(3900~14500)		
		kW	2.9(0.9~3.5)		3.8(1.1~4.2)		
Electrical Parts	Power Supply	V~,Hz,Ph	220-240V~,50Hz,1Ph		220-240V~,50Hz,1Ph		
	Power Input (W)	Cooling	650(270~1120)		970(270~1380)		
		Heating	690(270~1160)		950(270~1380)		
	Operating Current (A)	Cooling	2.9(1.3~5.0)		4.2(1.3~6.0)		
Heating		3.2(1.3~5.2)		4.1(1.3~6.0)			
Performance	EER	W/W	4.05		3.62		
	COP	W/W	4.25		4.01		
	Energy Rate		A+/A+		A+/A+		
	Air Flow Volume (m³/h)	Indoor	600/520/400		620/520/400		
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	39/34/26		40/35/28		
		Outdoor	54		54		
Net Dimension & Weight	Indoor(mm)	WxHxD	790x265x198		790x265x198		
	Outdoor(mm)	WxHxD	760x590x285		760x590x285		
	Net Weight (kg)	Indoor/Outdoor	8.5/38		8.5/38		
Packing Dimension	Indoor(mm)	WxHxD	875x335x265		875x335x265		
	Outdoor(mm)	WxHxD	887x645x355		887x645x355		
	Gross Weight (kg)	Indoor/Outdoor	10.5/40.5		10.5/40.5		
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")		Ø6.35 (1/4")		
	Gas(mm(inch))		Ø9.53 (3/8")		Ø9.53 (3/8")		
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35		30-45		
	Stuffing Quantity (Set)	20'/40'/40'HQ	95/202/245		95/202/245		

Specification_Luna Series (DC inverter)

		Indoor Unit		MS9A-09HRDNI-QC2		MS9A-12HRDNI-QC2		MS9A-18HRDNI-QC2		MS9A-24HRDNI-QC2W	
		Outdoor Unit		MOR-09HDNI-QC2		MOR-12HDNI-QC2		MOC-18HDNI-QC2		MOF-24HDNI-QC2W	
Capacity	Cooling Capacity	Btu/h	9000(3000~10500)		12000(3800~13800)		17000(5200~19000)		23000(12000~25000)		
		kW	2.6(0.9~3.0)		3.5(1.1~4.0)		5.0(1.5~5.5)		6.7(3.5~7.3)		
	Heating Capacity	Btu/h	10000(3200~11500)		13000(3400~14500)		18000(5300~20000)		25000(11000~27000)		
		kW	2.9(0.9~3.4)		3.8(1.0~4.2)		5.3(1.5~5.8)		7.3(3.2~7.9)		
Electrical Parts	Power Supply	V~,Hz,Ph	220-240V~,50Hz,1Ph		220-240V~,50Hz,1Ph		220-240V~,50Hz,1Ph		220-240V~,50Hz,1Ph		
	Power Input (W)	Cooling	820(270~1100)		1090(300~1350)		1550(350~2050)		2100(820~2500)		
		Heating	810(270~1160)		1050(300~1420)		1460(350~2050)		2030(800~2700)		
	Operating Current (A)	Cooling	3.8(1.2~5.0)		4.8(1.3~5.9)		6.7(1.6~9.1)		9.4(3.6~11.2)		
Heating		3.7(1.2~5.2)		4.6(1.3~6.2)		6.4(1.6~9.1)		9.1(3.5~12.0)			
Performance	EER	W/W	3.22		3.23		3.21		3.21		
	COP	W/W	3.62		3.63		3.61		3.61		
	Energy Rate		A/A		A/A		A/A		A/A		
	Air Flow Volume (m³/h)	Indoor	550/450/350		600/520/400		800/700/600		1150/1000/900		
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	37/33/26		39/34/28		43/39/33		49/46/43			
	Outdoor	52		52		56		57			
Net Dimension & Weight	Indoor(mm)	WxHxD	710x250x190		790x265x198		918x292x223		998x322x235		
	Outdoor(mm)	WxHxD	660x540x255		660x540x255		760x590x285		845x695x335		
	Net Weight (kg)	Indoor/Outdoor	7.5/27.5		9/29		11.5/39.5		13/49.5		
Packing Dimension	Indoor(mm)	WxHxD	770x318x265		875x335x265		1015x368x295		1080x400x320		
	Outdoor(mm)	WxHxD	770x585x325		770x585x325		887x645x355		965x755x395		
Gross Weight (kg)	Indoor/Outdoor	9.5/29.5		11/31		15/42		17/52.5			
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø9.53 (3/8")		
	Gas(mm(inch))		Ø9.53 (3/8")		Ø9.53 (3/8")		Ø12.7 (1/2")		Ø16.0 (5/8")		
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35		30-45		40-64		50-88		
	Stuffing Quantity (Set)	20'/40'/40'HQ	150/295/332		135/275/310		88/180/220		65/136/163		

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Specification_Luna Series (ON/OFF)


		Indoor Unit		MS9A-07HRNI-QC2		MS9A-09HRNI-QC2		MS9A-12HRNI-QC2		MS9A-18HRNI-QC0		MS9A-21HRNI-QB8W		MS9A-24HRNI-QB8W	
		Outdoor Unit		MOKI-07HNI-QC2		MOAI-09HNI-QC2		MOBI-12HNI-QC2		MOC-18HNI-QC0		MOP-21HNI-QB8W		MOFI-24HNI-QB8W	
Capacity	Cooling Capacity	Btu/h	7000		9000		12000		17000		21000		24000		
		kW	2.1		2.6		3.5		5.0		6.2		7.0		
	Heating Capacity	Btu/h	8000		9500		14000		18000		23000		26000		
		kW	2.3		2.8		4.1		5.3		6.7		7.6		
Electrical Parts	Power Supply	V~,Hz,Ph	220-240, 50, 1		220-240, 50, 1		220-240, 50, 1		220-240, 50, 1		220-240, 50, 1		220-240, 50, 1		
	Power Input (W)	Cooling	640		820		1090		1660		2190		2500		
		Heating	650		770		1130		1550		2100		2360		
	Operating Current (A)	Cooling	2.8		3.7		4.9		7.5		9.5		11.0		
Heating		2.8		3.4		5.1		7.0		9.0		10.5			
Performance	EER	W/W	3.21		3.21		3.23		3.01		2.81		2.81		
	COP	W/W	3.61		3.61		3.63		3.41		3.21		3.21		
	Energy Rate		A/A		A/A		A/A		B/B		C/C		C/C		
	Air Flow Volume (m³/h)	Indoor	430		500		580		860		1100		1220		
		Outdoor	51		54		54		57		62		62		
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	36/33/30		38/35/32		39/37/34		42/39/37		45/42/40		48/46/43		
Net Dimension & Weight	Indoor(mm)	WxHxD	710x250x190		710x250x190		790x265x198		918x292x223		998x322x235		998x322x235		
	Outdoor(mm)	WxHxD	685x430x260		700x535x235		780x540x250		760x590x285		820x600x345		845x695x335		
	Net Weight (kg)	Indoor/Outdoor	7/24		7.5/24.5		9/32.5		11.5/38.5		15.5/51		16/52		
Packing Dimension	Indoor(mm)	WxHxD	770x318x265		770x318x265		875x335x265		1015x368x295		1080x400x320		1080x400x320		
	Outdoor(mm)	WxHxD	795x495x345		815x580x325		910x575x335		887x645x355		940x645x415		965x755x395		
Gross Weight (kg)	Indoor/Outdoor	9/26.5		9/26.5		11/35		14.5/41		18.5/56		19/57			
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø6.35 (1/4")		Ø9.53 (3/8")		Ø9.53 (3/8")		
	Gas(mm(inch))		Ø9.53 (3/8")		Ø9.53 (3/8")		Ø9.53 (3/8")		Ø12.7 (1/2")		Ø16.0 (5/8")		Ø16.0 (5/8")		
Applicable Area & Stuffing Quantity	Applicable Area (m²)		14-23		23-32		27-42		35-60		40-70		45-82		
	Stuffing Quantity (Set)	20'/40'/40'HQ	143/302/345		137/286/317		112/231/259		89/182/215		77/159/175		68/138/165		

Specification_Luna Series Multi (ON/OFF)

		Indoor Unit		MS9AI-09HRNI-Q		MS9AI-12HRNI-Q		MS9AI-18HRNI-Q						
Performance	Cooling/Heating	Btu/h	9000/11000		12000/13000		18000/20000							
	Air Flow	m³/h	500		600		850							
	Noise Level	Hi/Med/Lo	37/34/31		40/37/34		42/39/37							
	Net Dimension (mm)	WxHxD	710x250x190		790x265x198		918x292x240							
	Packing Dimension (mm)	WxHxD	770x318x265		875x335x265		1015x368x295							
	Net/Gross Weight	kg	7.5/9.5		9/11		11.5/15							
Liquid/Gas Side	mm	Ø6.35/Ø9.53		Ø6.35/Ø9.53		Ø6.35/Ø12.7								
Capacity	Cooling Capacity	Btu/h	9000x2		9000+12000		12000+12000		12000+18000		9000x3		9000x2+12000	
		Heating Capacity	Btu/h	10000x2		10000+14000		13000+13000		13000+18000		10000x3		10000x2+14000
	Power Supply	V~,Hz,Ph	220-240,50,1		220-240,50,1		220-240,50,1		220-240,50,1		220-240,50,1		220-240,50,1	
		Power Input (W)	Cooling/Heating	840x2/840x2		850+1150/860+1190		1160x2/1170x2		1170+1730/1160+1670		1600+970/1700+1000		1800+1080/1900+1170
	Operating Current (A)	Cooling/Heating	40x2/40x2		40+5.7/41.1+5.7		5.3x2/5.4x2		5.4+7.9/5.3+7.6		8.0+5.1/8.1+5.2		8.3+5.4/8.6+5.6	
	EER/COP	W/W	3.10-B/3.45-B		3.04-B/3.42-B		3.01-B/3.24-C		3.00-B/3.21-C		3.03-B/3.22-C		3.02-B/3.22-C	
	Net Dimension (mm)	WxHxD	895x655x345		895x655x345		860x830x330		860x830x330		860x830x330		860x830x330	
Packing Dimension (mm)	WxHxD	1045x700x470		1045x700x470		985x895x425		985x895x425		985x895x425		985x895x425		
Net/Gross Weight	kg	60/65		63/68		72.5/77		75/79		78/82		80/83		
Air Flow	m³/h	2200		2200		3200		3200		3200		3200		
Noise Level	dB(A)	56		56		58		58		58		58		

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



-  220-240V~, 50Hz
- Super DC inverter
- DC Inverter (COP:4.2)
- DC inverter
- ON/OFF
- Multi ON/OFF



Turbo Operation

With this function, the air conditioner will maximize the output of cooling or heating capacity, make the room cool down or heat up rapidly, and attain the desired temperature in the shortest time.



Sleep Mode



This function enables the unit to automatically increase (cooling) or decrease (heating) 1° c per hour for the first two hours, then hold steady for the next 5 hours, after that the unit will stop operation. It can maintain the optimal temperature and save energy.

- | | | |
|--|---|---|
|  Auto Restart Function |  Active Carbon Filter |  LED Display |
|  Sleep Mode |  Turbo Mode |  Temp Compensation |
|  Two-direction Air Vane |  Bio Filter |  Golden Fin |
|  Low Ambient Cooling |  Heating Belt (outdoor) |  Plasma |
|  Ionizer |  Silver Ion Filter |  Vitamin C Filter |
|  3M Filter | | |
- Features: ■ Standard ■ Optional

Specification_Corona Series (Super DC inverter)



	Indoor Unit Outdoor Unit	MSC-09HRFN1-ND2E MOC-09HFN1-ND2E	MSC-12HRFN1-ND0E MOC-12HFN1-ND0E	
Capacity	Cooling Capacity	Btu/h 9000(3400-11200)	11000(4000-13500)	
		kW 2.6(1.0-3.3)	3.2(1.2-4.0)	
	Heating Capacity	Btu/h 10000(3500-12000)	12000(4200-14500)	
		kW 2.9(1.0-3.5)	3.5(1.3-4.2)	
Electrical Parts	Power Supply	V~Hz,Ph 220-240, 50/60, 1	220-240, 50/60, 1	
	Power Input (W)	Cooling	630(220-1000)	800(280-1220)
		Heating	700(240-1100)	880(300-1300)
	Operating Current (A)	Cooling	3.2(1.1-4.8)	4.0(1.4-6.0)
Heating		3.5(1.2-5.4)	4.3(1.5-6.4)	
Performance	EER	W/W 4.2	4.0	
	COP	W/W 4.2	4.0	
	Energy Rate	A+/A+	A+/A+	
	Air Flow Volume (m³/h)	Indoor 600	630	
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	39/34/28	41/36/29	
	Outdoor	54	54	
Net Dimension & Weight	Indoor(mm)	WxHxD 790x265x195	790x265x195	
	Outdoor(mm)	WxHxD 760x590x285	760x590x285	
	Net Weight (kg)	Indoor/Outdoor 8/41	8.5/41	
Packing Dimension	Indoor(mm)	WxHxD 875x375x285	875x375x285	
	Outdoor(mm)	WxHxD 887x645x355	887x645x355	
	Gross Weight (kg)	Indoor/Outdoor 11/44	11.5/44	
Piping Size	Liquid(mm(inch))	Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))	Ø9.53 (3/8")	Ø12.7 (1/2")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)	25-35	30-45	
	Stuffing Quantity (Set)	20/40/40/HQ	92/184/225	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



Specification_Corona Series DC Inverter (COP:4.2)

Indoor Unit		MSC-09HRDNI-QD0		MSC-12HRDNI-QC6	
Outdoor Unit		MOC-09HDNI-QD0		MOC-12HDNI-QC6	
Capacity	Cooling Capacity	Btu/h	9000(3100-11200)	12000(3800-14700)	
		kW	2.6(0.9-3.3)	3.5(1.1-4.3)	
Heating Capacity	Btu/h	10000(3300-12300)	13000(4000-15200)		
	kW	2.9(1.0-3.6)	3.8(1.2-4.4)		
Electrical Parts	Power Supply	V~Hz,Ph	220-240, 50, 1	220-240, 50, 1	
	Power Input (W)	Cooling	660(300-1100)	970(400-1480)	
		Heating	690(310-1150)	950(390-1460)	
	Operating Current (A)	Cooling	2.9(1.3-4.8)	4.3(1.8-6.5)	
Heating		3.0(1.4-5.0)	4.2(1.7-6.4)		
Performance	EER	W/W	4.0	3.62	
	COP	W/W	4.2	4.0	
	Energy Rate		A+/A+	A+/A+	
	Air Flow Volume (m³/h)	Indoor	600	620	
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	40/35/28	41/36/29	
Outdoor		54	54		
Net Dimension & Weight	Indoor(mm)	WxHxD	790x265x195	790x265x195	
	Outdoor(mm)	WxHxD	760x590x285	760x590x285	
	Net Weight (kg)	Indoor/Outdoor	9/40.5	9/40.5	
Packing Dimension	Indoor(mm)	WxHxD	875x375x285	875x375x285	
	Outdoor(mm)	WxHxD	887x645x355	887x645x355	
	Gross Weight (kg)	Indoor/Outdoor	11/43	11/43	
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))		Ø9.53 (3/8")	Ø12.7 (1/2")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	
	Stuffing Quantity (Set)	20'/40'/40'HQ	92/184/225	92/184/225	

Specification_Corona Series (DC inverter)

Indoor Unit		MSC-09HRDNI-QC2		MSC-12HRDNI-QC2		MSC-18HRDNI-QC2(C)		MSC-24HRDNI-QC2W	
Outdoor Unit		MOR-09HDNI-QC2		MOR-12HDNI-QC2		MOC-18HDNI-QC2		MOF-24HDNI-QC2W	
Capacity	Cooling Capacity	Btu/h	9000(2050~11200)	12000(4000~13800)	17000(5100-22000)	23000(12000~25000)			
		kW	2.6(0.6-3.3)	3.5(1.2-4.0)	5.0(1.5-6.4)	6.7(3.5~7.3)			
	Heating Capacity	Btu/h	10000(3200~13200)	13000(4100~14500)	17500(5300-23000)	25000(11000~27000)			
		kW	2.9(0.9-3.8)	3.8(1.2-4.2)	5.1(1.6-6.7)	7.3(3.2~7.9)			
Electrical Parts	Power Supply	V~Hz,Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240V~50Hz, 1Ph			
	Power Input (W)	Cooling	820(230~1070)	1090(350~1170)	1550(380-2300)	2100(820~2500)			
		Heating	810(230~960)	1050(350~1100)	1420(350-2100)	2030(800~2700)			
	Operating Current (A)	Cooling	3.6(1.0~4.7)	4.8(1.5~5.0)	6.9(1.8-10.2)	9.4(3.6~11.2)			
Heating		3.5(1.0~4.2)	4.6(1.5~4.8)	6.4(1.6-9.5)	9.1(3.5~12.0)				
Performance	EER	W/W	3.22	3.23	3.21	3.21			
	COP	W/W	3.62	3.63	3.61	3.61			
	Energy Rate		A/A	A/A	A/A	A/A			
	Air Flow Volume (m³/h)	Indoor	550	620	800	1150			
	Noise Level (dB(A))	Indoor(Hi/Med/Lo)	39/33/28	40/35/29	45/40/37	48/45/41			
Outdoor		52	52	56	58				
Net Dimension & Weight	Indoor(mm)	WxHxD	710x250x195	790x265x195	920x292x225	1080x330x225			
	Outdoor(mm)	WxHxD	660x540x255	660x540x255	760x590x285	845x695x335			
	Net Weight (kg)	Indoor/Outdoor	7.5/27.5	9/29	11.5/40.5	15.5/49.5			
Packing Dimension	Indoor(mm)	WxHxD	800x340x270	875x375x285	1015x368x295	1165x445x320			
	Outdoor(mm)	WxHxD	770x585x325	770x585x325	887x645x355	965x755x395			
	Gross Weight (kg)	Indoor/Outdoor	9.5/29.5	11/31	14.5/43	20.5/52.5			
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")			
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")			
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	40-64	50-88			
	Stuffing Quantity (Set)	20'/40'/40'HQ	140/280/310	120/250/290	90/181/216	65/134/155			

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Specification_Corona Series (ON/OFF)

Indoor Unit		MSC-07HRNI-QC2		MSC-09HRNI-QC2		MSC-12HRNI-QC2		MSC-18HRNI-QC2		MSC-21HRNI-QB8W		MSC-24HRNI-QB8W	
Outdoor Unit		MOK2-07HNI-QC2		MOA1-09HNI-QC2		MOB2-12HNI-QC2		MOF-18HNI-QC2		MOF2-21HNI-QB8W		MOF2-24HNI-QB8W	
Capacity	Cooling Capacity	Btu/h	7000	8500	11000	18000	21000	24000					
		kW	2.1	2.5	3.2	5.3	6.2	7.0					
	Heating Capacity	Btu/h	7000	9500	11000	19000	23000	25000					
		kW	2.1	2.7	3.2	5.6	6.7	7.3					
Electrical Parts	Power Supply	V~Hz,Ph	1, 220-240V~, 50Hz	1, 220-240V~, 50Hz	1, 220-240V~, 50Hz	1, 220-240V~, 50Hz	220-240V~, 50Hz	1, 220-240V~, 50Hz					
	Power Input (W)	Cooling	640	775	1000	1640	2200	2510					
		Heating	568	770	890	1540	2100	2280					
	Operating Current (A)	Cooling	2.75	3.5	4.4	7.4	9.5	11.5					
Heating		2.5	3.4	4.0	6.9	10.2	10.4						
Performance	EER	W/W	3.21	3.21	3.22	3.21	2.81	2.81					
	COP	W/W	3.61	3.61	3.62	3.61	3.21	3.21					
	Energy Rate		A/A	A/A	A/A	A/A	C/C	C/C					
	Air Flow Volume (m³/h)	Indoor	450	500	580	850	1020	1080					
		Outdoor	52	53	54	58	59	60					
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	37/32/29	39/34/29	40/35/31	44/40/37	47/44/40	48/45/42						
	Outdoor	52	53	54	58	59	60						
Net Dimension & Weight	Indoor(mm)	WxHxD	710x250x195	710x250x195	790x265x195	920x292x225	1080x330x225	1080x330x225					
	Outdoor(mm)	WxHxD	685x420x250	700x35x235	780x540x250	845x695x335	845x695x335	845x695x335					
	Net Weight (kg)	Indoor/Outdoor	8/25.5	8/24.5	9/26	12/44	17/58	17/53					
Packing Dimension	Indoor(mm)	WxHxD	800x340x270	800x340x270	875x375x285	1015x368x295	1165x445x320	1165x445x320					
	Outdoor(mm)	WxHxD	795x495x345	815x580x325	910x575x335	965x755x395	965x755x395	965x755x395					
	Gross Weight (kg)	Indoor/Outdoor	9.5/29.5	9.5/26.5	11/28	15/47.5	21/62	22/57					
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")	Ø9.53 (3/8")					
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø12.7 (1/2")	Ø16.0 (5/8")	Ø16.0 (5/8")					
Applicable Area & Stuffing Quantity	Applicable Area (m²)		14-23	23-32	27-42	35-60	40-70	45-82					
	Stuffing Quantity (Set)	20'/40'/40'HQ	140/280/341	129/269/300	120/252/285	70 / 148 / 170	60/132/142	60/132/142					

Specification_Corona Series Multi (ON/OFF)

Indoor Unit		MSCI-09HRNI		MSCI-12HRNI		MSCI-18HRNI	
Performance	Cooling/Heating	Btu/h	9000/11000	12000/13000	18000/20000		
	Air Flow	m³/h	500	600	850		
	Noise Level	Hi/Med/Lo	37/34/31	40/37/34	42/39/37		
	Net Dimension (mm)	WxHxD	710x250x195	790x265x195	920x292x225		
	Packing Dimension (mm)	WxHxD	800x340x270	875x375x285	1015x368x295		
	Net/Gross Weight	kg	8/9.5	9/11	12/14		
Liquid/Gas Side	mm	Ø6.35/Ø9.53		Ø6.35/Ø12.7		Ø6.35/Ø12.7	

Outdoor Unit		M20A-18HRNI		M20A-21HRNI		M20A-24HRNI		M20A-30HRNI		M30C-27HRNI-Q		M30C-30HRNI-Q	
Capacity	Cooling Capacity	Btu/h	9000x2	9000+12000	12000+12000	12000+18000	9000x3	9000x2+12000					
	Heating Capacity	Btu/h	10000x2	10000+14000	13000+13000	13000+18000	10000x3	10000x2+14000					
Electrical Parts	Power Supply	V~Hz,Ph	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1					
	Power Input (W)	Cooling/Heating	840x2/840x2	850+1150/860+1190	1160x2/1170x2	1170+1730/1160+1670	1600+970/1700+1000	1800+1080/1900+1170					
	Operating Current (A)	Cooling/Heating	4.0x2/4.0x2	4.0+5.7/4.1+5.7	5.3x2/5.4x2	5.4+7.9/5.3+7.6	8.0+5.1/8.1+5.2	8.3+5.4/8.6+5.6					
Dimension & Weight	EER/COP	W/W	3.10-B/3.45-B	3.04-B/3.42-B	3.01-B/3.24-C	3.00-B/3.21-C	3.03-B/3.22-C	3.02-B/3.22-C					
	Net Dimension (mm)	WxHxD	895x655x345	895x655x345	860x830x330	860x830x330	860x830x330	860x830x330					
	Packing Dimension (mm)	WxHxD	1045x700x470	1045x700x470	985x895x425	985x895x425	985x895x425	985x895x425					
	Net/Gross Weight	kg	60/65	63/68	72/77	75/79	78/82	80/83					
Air Flow	m³/h	2200	2200	3200	3200	3200	3200						
Noise Level	dB(A)	56	56	58	58	58	58						

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



 220-240V~, 50Hz

DC Inverter


ON/OFF

Multi ON/OFF




Two-direction Air Vane

In cooling mode, the air vane opens upward, which directs the air horizontally. It allows for rapid and evenly distributed temperature fall. In heating mode, the air vane opens downward, which directs the air towards the floor. It allows for rapid and evenly distributed temperature rise.

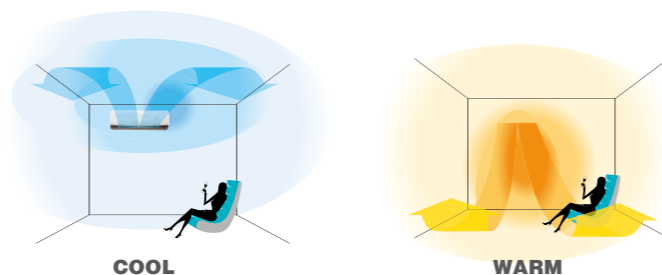


Bio Filter

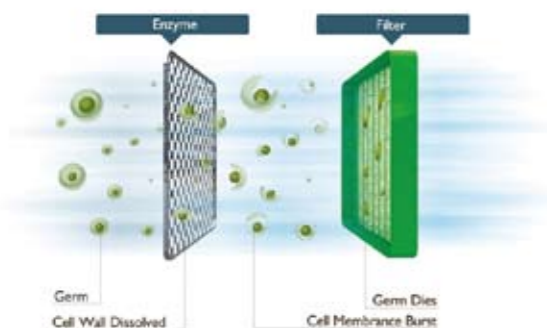

Bio Filter consists of a specialized biological enzyme and Eco filter. The Eco filter catches very small airborne dust particles and neurilities bacteria, fungi and microbes. Biological enzyme eliminates bacteria by dissolving their cell wall thus eliminating their cell wall thus eliminating the problem of re-pollution.

Sterilization mechanism of Bio Filter

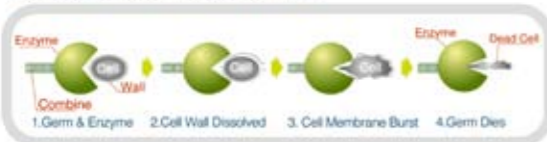

-  Auto Restart Function
-  Active Carbon Filter
-  Sleep Mode
-  Turbo Mode
-  Temp Compensation
-  Two-direction Air Vane
-  Bio Filter
-  Golden Fin
-  Low Ambient Cooling
-  Heating Belt (outdoor)
-  Silver Ion Filter
-  Vitamin C Filter
-  3M HAF Filter

Features: ■ Standard ■ Optional

Specification_Glory Series (DC Inverter)



	Indoor Unit Outdoor Unit		MSG-09HRDNI-QC2 MOR-09HDNI-QC2	MSG-12HRDNI-QC2 MOR2-12HDNI-QC2	MSG-18HRDNI-QC2(C) MOC-18HDNI-QC2	MSG-24HRDNI-QC2W MOF-24HDNI-QC2W
Capacity	Cooling Capacity	Btu/h	8500(2250-10000)	12000(4000-13500)	17000(5100-22000)	23000(12000-25000)
		kW	2.5(0.7-2.9)	3.5(1.2-4.0)	5.0(1.5-6.5)	6.7(3.5-7.3)
	Heating Capacity	Btu/h	9000(2300-11000)	13000(4200-14500)	17000(5300-23000)	25000(11000-27000)
		kW	2.6(0.7-3.2)	3.8(1.3-4.3)	5.0(1.6-6.7)	7.3(3.2-7.9)
Electrical Parts	Power Supply	V~,Hz,Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240V~,50Hz,1Ph
	Power Input (W)	Cooling	770(180-1100)	1090(280-1220)	1550(380-2300)	2100(820-2500)
		Heating	730(170-1050)	1050(300-1300)	1380(350-2000)	2030(800-2700)
	Operating Current (A)	Cooling	3.4(0.9-4.8)	4.8(1.4-6.0)	6.9(1.8-10.2)	9.4(3.6-11.2)
Heating		3.2(0.8-4.6)	4.6(1.5-6.4)	6.2(1.6-9.0)	9.1(3.5-12.0)	
Performance	EER	W/W	3.23	3.23	10.9,3.21	3.21
	COP	W/W	3.61	3.63	3.61	3.61
	Energy Rate		A/A	A/A	A/A	A/A
	Air Flow Volume (m ³ /h)	Indoor	500	550	800	1150/970/900
Noise Level (dB(A))	Indoor(Hi/Med/Lo)		38/32/27	41/35/29	45/40/34	49/44/42
	Outdoor		52	52	56	57
Net Dimension & Weight	Indoor(mm)	WxHxD	750x250x196	815x280x195	906x286x235	1080x330x228
	Outdoor(mm)	WxHxD	660x540x255	660x540x255	760x590x285	845x695x335
	Net Weight (kg)	Indoor/Outdoor	7.5/27.5	9.5/29	11/40.5	15.5/49.5
Packing Dimension	Indoor(mm)	WxHxD	830x335x280	915x360x275	1020x381x328	1165x445x320
	Outdoor(mm)	WxHxD	770x585x325	770x585x325	887x655x355	965x755x395
	Gross Weight (kg)	Indoor/Outdoor	9.5/29.5	11.5/31	15/43	17/52.5
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")
Applicable Area & Stuffing Quantity	Applicable Area (m ²)		25-35	30-45	40-64	50-88
	Stuffing Quantity (Set)		20/40/40/HQ	134/270/312	125/260/302	88/170/200

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Specification_Glory Series (ON/OFF)

			Indoor Unit	MSG-07HRNI-QC2	MSG-09HRNI-QC2	MSG-12HRNI-QC2
			Outdoor Unit	MOK-07HNI-QC2	MOA1-09HNI-QC2	MOB2-12HNI-QC2
Capacity	Cooling Capacity	Btu/h	7000	8500	11000	
		kW	2.1	2.5	3.2	
	Heating Capacity	Btu/h	7500	9000	11000	
		kW	2.2	2.6	3.2	
Electrical Parts	Power Supply	V~Hz,Ph	220-240V~, 50Hz, 1	220-240V~, 50Hz, 1	220-240V~, 50Hz, 1	
	Power Input (W)	Cooling	640	775	1000	
		Heating	609	730	890	
	Operating Current (A)	Cooling	2.8	3.5	4.4	
		Heating	2.7	3.4	4.0	
Performance	EER	W/W	3.21	3.21	3.21	
	COP	W/W	3.6	3.61	3.61	
	Energy Rate		A/A	A/A	A/A	
	Air Flow Volume (m³/h)	Indoor	450	500	580	
		Noise Level (dB(A))	Indoor(Hi/Med/Lo)	37/33/29	38/34/31	39/35/32
		Outdoor	52	53	54	
Net Dimension & Weight	Indoor(mm)	WxHxD	750x250x198	750x250x198	815x280x195	
	Outdoor(mm)	WxHxD	685x420x250	700x535x235	780x540x250	
	Net Weight (kg)	Indoor/Outdoor	7.5/21	8/24.5	9.5/26	
Packing Dimension	Indoor(mm)	WxHxD	830x335x280	830x335x280	915x360x275	
	Outdoor(mm)	WxHxD	795x495x345	815x580x325	910x575x335	
	Gross Weight (kg)	Indoor/Outdoor	9.5/25	10/26.5	12/28	
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	
	Gas(mm(inch))		Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		14-23	23-32	27-42	
	Stuffing Quantity (Set)	20'/40'/40'HQ	134/270/326	134/270/326	102/220/260	

			Indoor Unit	MSG-18HRNI-QB8	MSG1-24HRNI-QB8W	MSG-36HRNI-RB9
			Outdoor Unit	MOE-18HNI-QB8	MOF2-24HNI-QB8W	MSG-36HRNI-RB9
Capacity	Cooling Capacity	Btu/h	17000	24000	32000	
		kW	5.0	7.0	9.4	
	Heating Capacity	Btu/h	18000	25000	36000	
		kW	5.3	7.3	10.6	
Electrical Parts	Power Supply	V~Hz,Ph	220-240V~, 50Hz, 1	220-240V~, 50Hz, 1	220-240V~, 50Hz, 3	
	Power Input (W)	Cooling	1770	2510	3230	
		Heating	1640	2280	3350	
	Operating Current (A)	Cooling	7.7	11.5	6.3	
		Heating	7.2	10.4	6.8	
Performance	EER	W/W	2.82	2.82	2.91	
	COP	W/W	3.21	3.22	3.15	
	Energy Rate		C/C	C/C	C/C	
	Air Flow Volume (m³/h)	Indoor	800	1050	1350	
		Noise Level (dB(A))	Indoor(Hi/Med/Lo)	45/40/37	48/43/39	52/49/45
		Outdoor	56	59	62	
Net Dimension & Weight	Indoor(mm)	WxHxD	906x286x235	1080x330x222	1250x325x230	
	Outdoor(mm)	WxHxD	760x590x285	845x695x335	895x857x302	
	Net Weight (kg)	Indoor/Outdoor	11.5/39	17/53	18/78	
Packing Dimension	Indoor(mm)	WxHxD	1020x381x328	1165x445x320	1345x430x335	
	Outdoor(mm)	WxHxD	887x645x355	965x755x395	1043x915x395	
	Gross Weight (kg)	Indoor/Outdoor	14.5/42	22/57	23/83	
Piping Size	Liquid(mm(inch))		Ø6.35(1/4")	Ø9.53(3/8")	Ø9.53(3/8")	
	Gas(mm(inch))		Ø12.7(1/2")	Ø16.0(5/8")	Ø16.0(5/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		35-60	45-82	68-110	
	Stuffing Quantity (Set)	20'/40'/40'HQ	80/168/204	60/127/142	47/98/112	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Specification_Glory Series Multi (ON/OFF)

			Indoor Unit	MSGI-09HRNI	MSGI-12HRNI
Performance	Cooling/Heating	Btu/h	9000/10000	12000/13000	
	Air Flow	m³/h	510	660	
	Noise Level	Hi/Med/Lo	38/34/29	39/34/30	
	Net Dimension (mm)	WxHxD	750x250x188	750x250x188	
	Packing Dimension (mm)	WxHxD	830x336x280	830x336x280	
	Net/Gross Weight	kg	8.5/10	8.5/10	
	Liquid/Gas Side	mm	Ø6.35/Ø9.53	Ø6.35/Ø12.7	

			Outdoor Unit	M20A-18HRNI	M20A-21HRNI	M20A-24HRNI
Capacity	Cooling Capacity	Btu/h	9000x2	9000+12000	12000+12000	
	Heating Capacity	Btu/h	10000x2	10000+14000	13000+13000	
Electrical Parts	Power Supply	V~Hz,Ph	220-240,50,1	220-240,50,1	220-240,50,1	
	Power Input (W)	Cooling/Heating	840x2/840x2	850+1150/860+1190	1160x2/1170x2	
	Operating Current (A)	Cooling/Heating	4.0x2/4.0x2	4.0+5.7/4.1+5.7	5.3x2/5.4x2	
Dimension & Weight	EER/COP	W/W	3.10-B/3.45-B	3.04-B/3.42-B	3.01-B/3.24-C	
	Net Dimension (mm)	WxHxD	895x655x345	895x655x345	860x830x330	
	Packing Dimension (mm)	WxHxD	1045x700x470	1045x700x470	985x895x425	
	Net/Gross Weight	kg	60/65	63/68	72.5/77	
	Air Flow	m³/h	2200	2200	3200	
	Noise Level	dB(A)	56	56	58	

			Outdoor Unit	M30C-27HRNI-Q	M30C-30HRNI-Q
Capacity	Cooling Capacity	Btu/h	9000x3	9000x2+12000	
	Heating Capacity	Btu/h	10000x3	10000x2+14000	
Electrical Parts	Power Supply	V~Hz,Ph	220-240,50,1	220-240,50,1	
	Power Input (W)	Cooling/Heating	1600+970/1700+1000	1800+1080/1900+1170	
	Operating Current (A)	Cooling/Heating	8.0+5.1/8.1+5.2	8.3+5.4/8.6+5.6	
Dimension & Weight	EER/COP	W/W	3.03-B/3.22-C	3.02-B/3.22-C	
	Net Dimension (mm)	WxHxD	860x830x330	860x830x330	
	Packing Dimension (mm)	WxHxD	985x895x425	985x895x425	
	Net/Gross Weight	kg	78/82	80/83	
	Air Flow	m³/h	3200	3200	
	Noise Level	dB(A)	58	58	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.



-  220-240V~, 50Hz
- DC Inverter
- ON/OFF
- Multi ON/OFF



TEMP. Compensation

The ceiling temperature is often higher than the floor temperature. This function can automatically eliminate the temperature difference between them.



3M HAF Filter



The filter can collect the particles down to 0.1 μm. When equipped with Ionizer, the efficiency can be much more improved. The filter can protect itself from mildew breeding.

- | | | |
|---|---|--|
|  Auto Restart Function |  Active Carbon Filter |  LED Display |
|  Sleep Mode |  Turbo Mode |  Temp Compensation |
|  Bio Filter |  Golden Fin |  Heating Belt (outdoor) |
|  Low Ambient Cooling |  Silver Ion Filter |  Vitamin C Filter |
|  3M HAF Filter | | |

Features: ■ Standard ■ Optional

Specification_R Series (DC Inverter)



	Indoor Unit	Outdoor Unit	MSR1-09HRDNI-QC8	MOC-09HDNI-QC8	MSR1-12HRDNI-QC4	MOC-12HDNI-QC4	MSR1-09HRDNI-QC2	MOR-09HDNI-QC2	MSR1-12HRDNI-QC2	MOR2-12HDNI-QC2	MSR1-18HRDNI-QC2(C)	MOC-18HDNI-QC2	MSR1-24HRDNI-QC2W	MOF-24HDNI-QC2W
Capacity	Cooling Capacity	Btu/h	9000(3100~11500)	11000(3800~14000)	8500(2250~10000)	11000(2450~13500)	17000(5100~22000)	23000(12000~25000)						
		kW	2.6(0.9~3.4)	3.2(1.1~4.1)	2.5(0.7~2.9)	3.2(0.7~4.0)	5.0(1.5~6.4)	6.7(3.5~7.3)						
	Heating Capacity	Btu/h	10000(3200~12000)	12500(3900~14500)	9500(2300~11000)	12500(2800~16000)	17000(5300~23000)	25000(11000~27000)						
		kW	2.9(0.9~3.5)	3.7(1.1~4.2)	2.8(0.7~3.2)	3.6(0.8~4.6)	5.0(1.5~6.7)	7.3(3.2~7.9)						
Electrical Parts	Power Supply	V~, Hz, Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph	220-240V~50Hz, 1Ph
		Power Input (W)	Cooling	690(270~1100)	940(340~1380)	770(180~1100)	1000(210~1380)	1550(380~2300)	2100(820~2500)					
	Heating	720(270~1160)	960(360~1450)	770(170~1050)	1010(210~1480)	1380(350~2000)	2030(800~2700)							
	Operating Current (A)	Cooling	3.1(1.2~4.8)	4.1(1.6~5.8)	3.4(0.9~4.8)	4.4(1.0~6.2)	6.9(1.8~10.2)	9.4(3.6~11.2)						
Heating		3.3(1.2~5.2)	4.2(1.7~6.0)	3.4(0.8~4.6)	4.5(1.0~6.6)	6.2(1.6~9.0)	9.1(3.5~12.0)							
Performance	EER	W/W	3.82	3.42	3.23	3.22	3.21	3.21						
		COP	W/W	4.07	3.82	3.61	3.63	3.61	3.61					
	Energy Rate		A+/A+	A+/A+	A/A	A/A	A/A	A/A						
		Air Flow Volume (m³/h)	Indoor	550/450/350	550/450/350	450/380/300	550/450/350	800/700/600	1150/1050/900					
Noise Level (dB(A))	Indoor(Hi/Med/Lo)	41/36/30	41/36/30	36/33/26	41/35/29	45/42/37	48/45/41							
	Outdoor	54	54	52	52	56	57							
Net Dimension & Weight	Indoor(mm)	WxHxD	790x275x190	790x275x190	710x250x189	790x275x190	940x275x198	1030x313x221						
	Outdoor(mm)	WxHxD	760x590x285	760x590x285	660x540x255	660x540x255	760x590x285	845x695x335						
	Net Weight (kg)	Indoor/Outdoor	8.5/38.5	8.5/39	7/27.5	8.5/29	11/40.5	15.5/49.5						
Packing Dimension	Indoor(mm)	WxHxD	865x350x265	865x350x265	775x324x260	865x350x265	1015x350x265	1135x435x315						
	Outdoor(mm)	WxHxD	887x645x355	887x645x355	770x585x325	770x585x325	887x645x355	965x755x395						
	Gross Weight (kg)	Indoor/Outdoor	10.5/41	10.5/41.5	8.5/29.5	10.5/31	13/43	17/52.5						
Piping Size	Liquid(mm(inch))		Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø6.35 (1/4")	Ø9.53 (3/8")					
	Gas(mm(inch))		Ø9.53 (3/8")	Ø12.7 (1/2")	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø9.53 (3/8")	Ø12.7 (1/2")	Ø16.0 (5/8")					
Applicable Area & Stuffing Quantity	Applicable Area (m²)		25-35	30-45	25-35	30-45	40-64	50-88						
	Stuffing Quantity (Set)		20'/40'/40'HQ	95/196/240	95/196/240	145/295/335	135/275/310	90/181/216	64/132/155					

Remarks: 1. The above designs and specifications are subject to change of product improvement without prior notice.
2. The noise level data reflects the level in anechoic chamber.

Specification_R Series (ON/OFF)

Indoor Unit			MSR1-07HRN1-QC2(A)	MSR1-09HRN1-QC2(A)	MSR1-12HRN1-QC2	MSR1-18HRN1-QB8	MSR1-21HRN1-QB8W	MSR1-24HRN1-QB8W	
Outdoor Unit			MOK1-07HNI-QC2	MOA1-09HNI-QC2	MOB2-12HNI-QC2	MOE-18HNI-QB8	MOF-21HNI-QB8W	MOF2-24HNI-QB8W	
Capacity	Cooling Capacity	Btu/h	7000	9000	11000	17000	21000	24000	
		kW	2.1	2.6	3.2	5.0	6.2	7.0	
	Heating Capacity	Btu/h	8000	9500	11000	18000	24000	25000	
		kW	2.3	2.8	3.2	5.3	7.0	7.3	
Electrical Parts	Power Supply	V~,Hz,Ph	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	
	Power Input (W)	Cooling	640	820	1000	1700	2190	2510	
		Heating	650	770	890	1640	2190	2280	
	Operating Current (A)	Cooling	2.8	3.7	4.4	7.7	10.0	11.5	
Heating		2.8	3.4	3.9	7.5	10.0	10.4		
Performance	EER	W/W	3.21	3.21	3.22	2.93	2.81	2.81	
	COP	W/W	3.61	3.61	3.62	3.21	3.21	3.21	
	Energy Rate		A/A	A/A	A/A	C/C	C/C	C/C	
	Air Flow Volume (m³/h)	Indoor		420	460	580	800	1000	1050
		Noise Level (dB(A))	Indoor(Hi/Med/Lo)	35/32/29	37/34/31	42/39/31	45/42/37	47/44/40	48/45/42
Net Dimension & Weight	Indoor(mm)	WxHxD	710x250x189	710x250x189	790x275x195	940x275x198	1030x221x313	1030x221x313	
	Outdoor(mm)	WxHxD	685x430x260	700x535x235	780x540x250	760x590x285	845x695x335	845x695x335	
	Net Weight (kg)	Indoor/Outdoor	7/24	7/24.5	9/26	10/39	13/58	13.5/53	
Packing Dimension	Indoor(mm)	WxHxD	775x324x260	775x324x260	865x350x265	1015x350x265	1135x435x315	1135x435x315	
	Outdoor(mm)	WxHxD	795x495x345	815x580x325	910x575x335	887x645x355	965x755x395	965x755x395	
	Gross Weight (kg)	Indoor/Outdoor	8.5/26.5	8.5/26.5	11/28	13/42	20/62	20/57	
Piping Size	Liquid(mm(inch))		Ø6.35(1/4")	Ø6.35(1/4")	Ø6.35(1/4")	Ø6.35(1/4")	Ø9.53(3/8")	Ø9.53(3/8")	
	Gas(mm(inch))		Ø9.53(3/8")	Ø9.53(3/8")	Ø12.7(1/2")	Ø12.7(1/2")	Ø16.0(5/8")	Ø16.0(5/8")	
Applicable Area & Stuffing Quantity	Applicable Area (m²)		14-23	23-32	27-42	40-70	45-82	52-90	
	Stuffing Quantity (Set)	20'/40'/40'HQ	141/295/346	135/287/322	108/225/255	85/180/205	64/134/150	64/134/150	

Specification_R Series Multi (ON/OFF)

Indoor Unit			MSR11-09HRN1-Q	MSR11-12HRN1
Performance	Cooling/Heating	Btu/h	9000/10000	11000/12000
	Air Flow	m³/h	380	550
	Noise Level	Hi/Med/Lo	39/36/32	43/41/35
	Net Dimension (mm)	WxHxD	710x250x189	790x275x190
	Packing Dimension (mm)	WxHxD	775x324x260	865x350x265
	Net/Gross Weight	kg	7/8.5	8.5/11
	Liquid/Gas Side	mm	Ø6.35/Ø9.53	Ø6.35/Ø12.7

Outdoor Unit			M20A-18HRN1	M20A-21HRN1	M20A-24HRN1	M30C-27HRN1-Q	M30C-30HRN1-Q
Capacity	Cooling Capacity	Btu/h	9000x2	9000+12000	12000+12000	9000x3	9000x2+12000
	Heating Capacity	Btu/h	10000x2	10000+14000	13000+13000	10000x3	10000x2+14000
Electrical Parts	Power Supply	V~,Hz,Ph	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1	220-240,50,1
	Power Input (W)	Cooling/Heating	840x2/840x2	850+1150/860+1190	1160x2/1170x2	1600+970/1700+1000	1800+1080/1900+1170
	Operating Current (A)	Cooling/Heating	4.0x2/4.0x2	4.0+5.7/4.1+5.7	5.3x2/5.4x2	8.0+5.1/8.1+5.2	8.3+5.4/8.6+5.6
Dimension & Weight	EER/COP	W/W	3.10-B/3.45-B	3.04-B/3.42-B	3.01-B/3.24-C	3.03-B/3.22-C	3.02-B/3.22-C
	Net Dimension (mm)	WxHxD	895x655x345	895x655x345	860x830x330	860x830x330	860x830x330
	Packing Dimension (mm)	WxHxD	1045x700x470	1045x700x470	985x895x425	985x895x425	985x895x425
	Net/Gross Weight	kg	60/65	63/68	72.5/77	78/82	80/83
	Air Flow	m³/h	2200	2200	3200	3200	3200
Noise Level	dB(A)	56	56	58	58	58	

Remarks: 1.The above designs and specifications are subject to change of product improvement without prior notice.
2.The noise level date reflects the level in anechoic chamber.

Portable

